


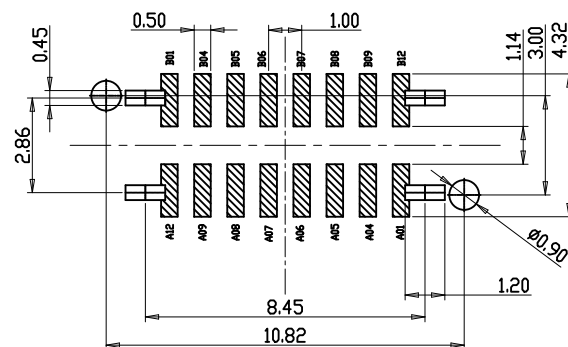


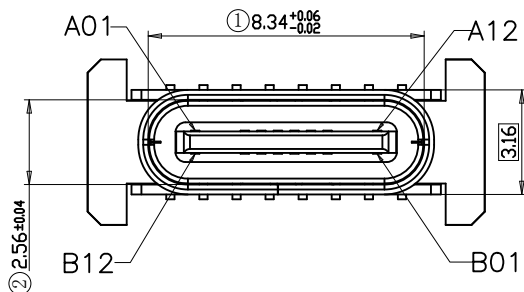



RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

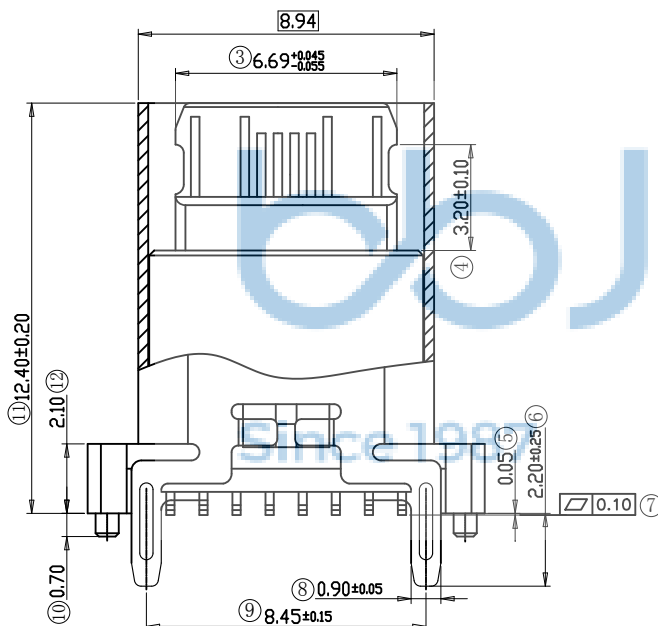

剖视图

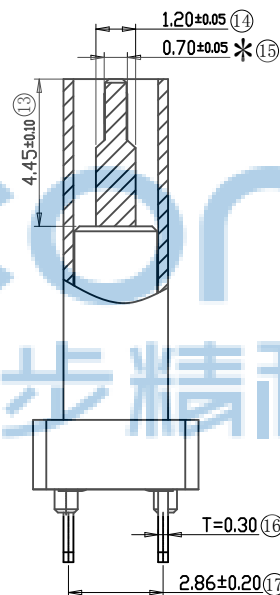

剖视图

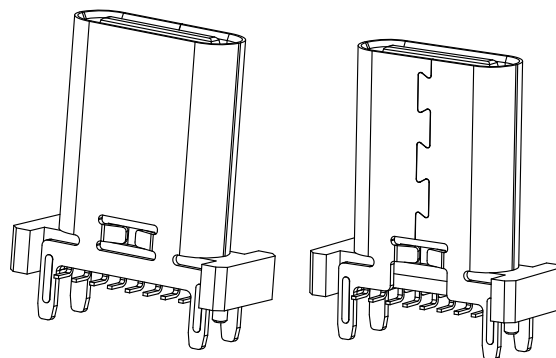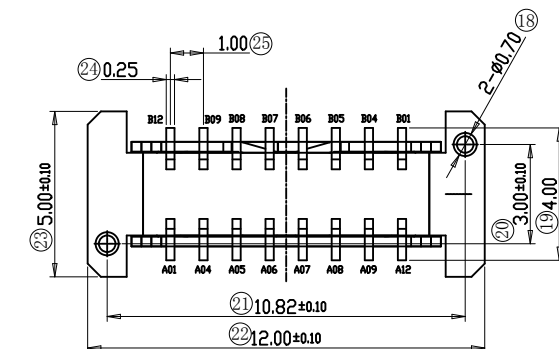

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

特性:

一、电气性能: ELECTRICAL

1. 额定电流: 5.0A
2. 额定电压: 20V
3. 接触阻抗: 40 MILLIOHMS MAX
4. 耐电压: 150V AC / 1 mA MAX
5. 绝缘阻抗: 150V DC/100 MEGA OHMS MIN

二、机械性能:

1. 插入力: 5~20N
2. 拨出力: 8~20N
3. 使用寿命: 10000次、拔出力 5N MIN

三、材料: MATERIAL

1. 塑胶: LCP/PA9T UL94V-0
2. 端子: C7025/C1814 T=0.15MM
3. 外壳: SUS304 T=0.30MM
4. 卡勾: SUS304 T=0.15MM

四、电镀:FINISH

1. 端子: 接触点镀金3U"MIN
PIN脚焊接区域镀金1U"MIN.

2. 外壳：镀镍50U~MIN（盐雾48H）
- 五、电镀品需做粘锡测试：粘锡面积达到95%以上。
- 六、SMT回流焊（峰值 $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$ ）不能起泡、熔胶、变色不良（变形在公差范围以内）
- 七、工作温度： $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6	SHELL	STAINLESS STEEL SUS304	NI Plated 60u	1PCS
5	SHIELDING PLATE	STAINLESS STEEL SUS304	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC LCP	BLACK	1PCS
3	CONTACT	COPPER ALLOY C7025	Au3u/Ni Plated 60-120u"	1SET
2	CONTACT	COPPER ALLOY C7025	Au3u/Ni Plated 60-120u"	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC LCP	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN ANY MANNER

OR IN PART WITHOUT

PRIOR WRITTEN PERMISSION.

PDWG,NO: 0366-2



深圳市步步精科技有限公司

.X: ± 0.38	X*: ± 3
.XX: ± 0.25	.X*: ± 2
.XXX: ± 0.13	.XX*: ± 1

APPD	IM Zheng
------	----------

Art 1 B.	UM_Zheng

CHKD.	TSP
-------	-----

DR.	I YX
-----	------

NAME: TYPE-C 16P 母座 直立式 四脚插 帶柱 H=12.40
端子SMT 端子鍍金3u 高導銅C7025 加蓋編帶


	DJ-VG-UG-01-61-1W-0017
--	------------------------

PJ. NO.: UC.01.61-1W-0017


SIZE: A4	DRW NO.:
----------	----------

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2
------------	----------	----------	-----------

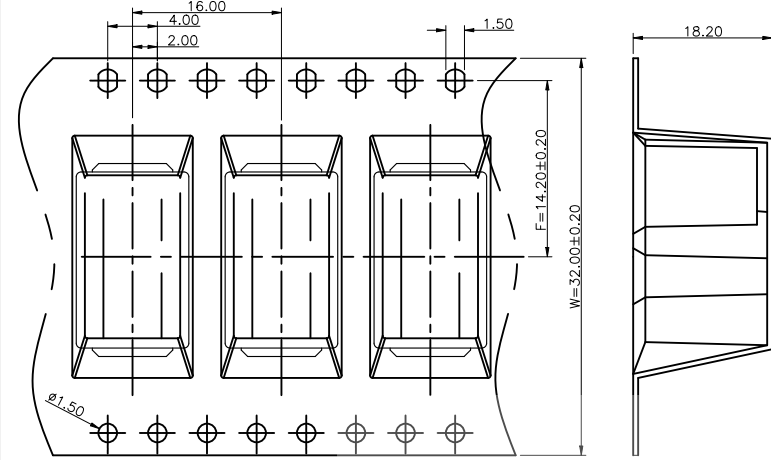

① 产品入载带示意图

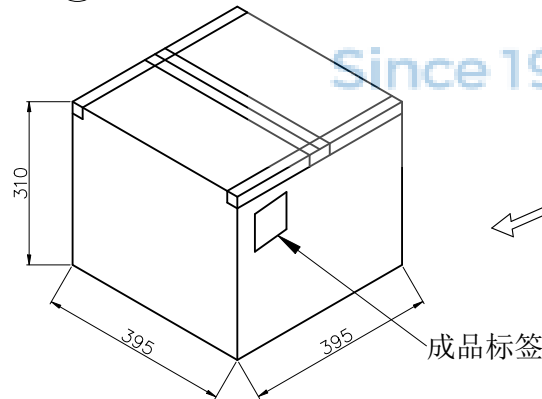


⑤ 外箱封箱示意图

包装说明:


1. 将检验好的成品;焊脚朝下放入载带底部;每卷装370PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每8盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
6. 载带前面留5PCS空格,后面留5PCS空格
7. COVER与CARRY剥离力:50~125g,速度:300mm/分钟左右,剥离角度:165°~180°

内 标签


② 卷盘贴标签示意图

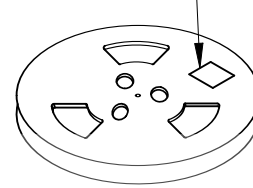

③ 8盘产品叠层示意图



④ 产品入外箱示意图

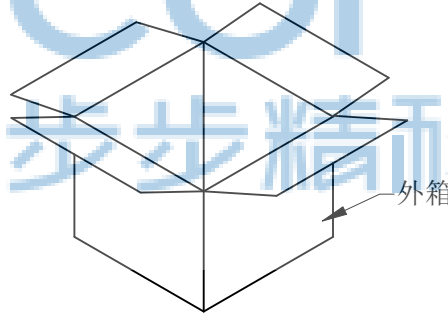

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0366-2		深圳市步步精科技有限公司					
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' .X': ±2' .XX': ±1*		NAME: TYPE-C 16P 母座 直立式 四脚插 带柱 H=12.40 端子SMT 端子镀金3u 高导电C7025 加盖编带	
		APPD. JM_Zheng				PJ. NO.: UC.01.61-1W-0017	
		CHKD. TSP				SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES		MAT'L.: SEE NOTES			
SCALE: N/A		REV.: A0		UNIT: mm		PAGE: 2/2	