

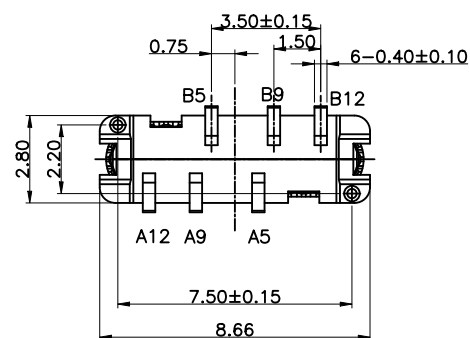
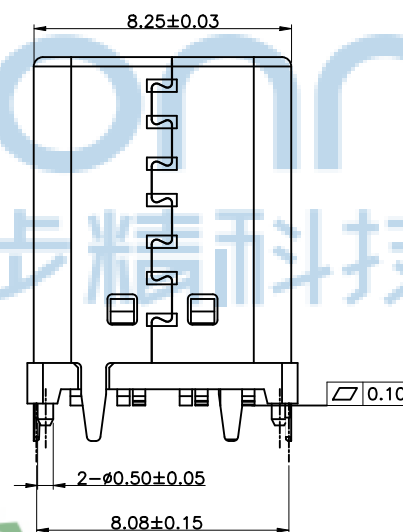
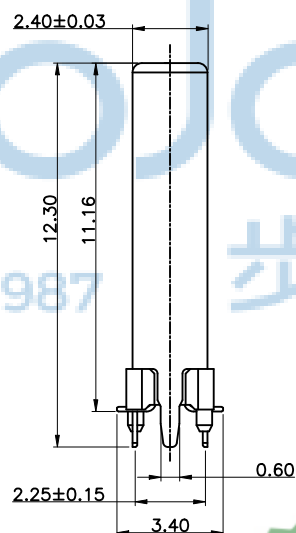
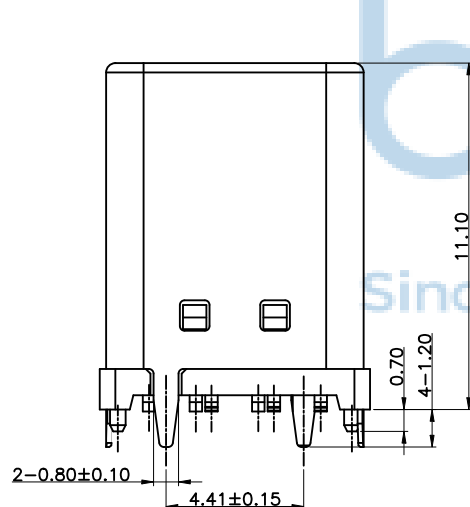



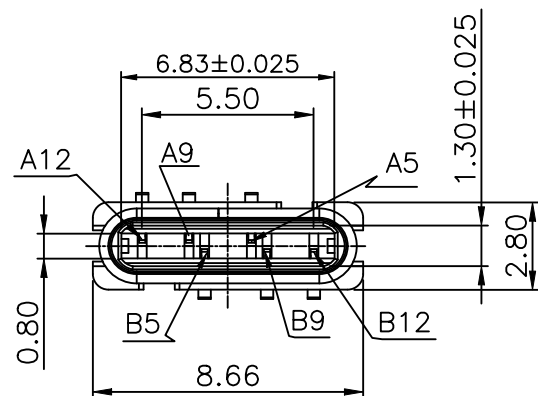

- MATERIAL SPECIFICATION:
 - 1-1. HOUSING&PICKUP COVER: LCP, UL94 V-0.
 - 2-2. CONTACTS: COPPER ALLOY (C7025)
 - 3-3. FRONT SHELL: STAINLESS STEEL (SUS304)
- PLATING SPECIFICATION:
 - 2-1. CONTACTS: Ni 50u" MIN. UNDER PLATED OVER ALL. Au PLATED ON THE FUNCTIONAL AREA OF CONTACT. (GOLD PLATING THICKNESS FOLLOW THE P/N)
 - PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
 - 2-2. FRONT SHELL: Ni 30u" MIN. UNDER PLATED OVER ALL.
- MECHANICAL PERFORMANCE,
 - 3-1. INSERTION FORCE: 0.5~2.0kgf.
 - 3-2. REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3. DURABILITY: 10000 CYCLES.
- ELECTRICAL PERFORMANCE,
 - 4-1. CURRENT RATING: 3.0A
 - VOLTAGE RATING: 5.0V
 - 4-2. LLCR:
 - VBUS & GND PINS AND OTHER PINS: 40mΩ /PIN MAX.
 - SHIELD: 50mΩ /MAX.
 - LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - 4-3. INSULATION RESISTANCE: 100MΩ MIN
 - 4-4. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
- IR REFLOW: THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

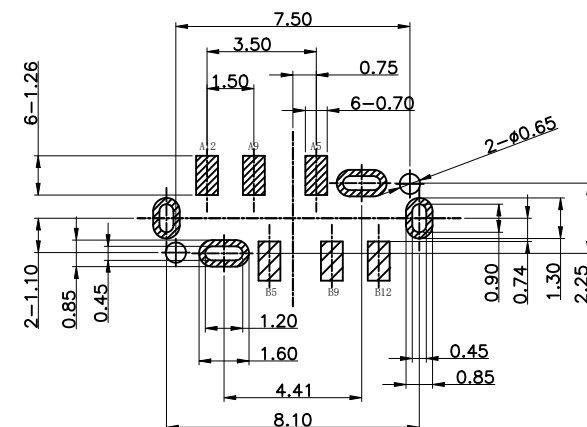

RECOMMENDED PCB LAYOUT(t=0.80±0.05)
COMPONENT SIDE(GENERAL TOLERANCE:±0.05)

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO:0366-2

深圳市步步精科技有限公司


NAME: TYPE-C 6P 公头 直立式 铆合款 端子SMT
四脚插 带柱 H=11.1 不锈钢外壳 编带

PJ NO: 126-124-060001-N5G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES


SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

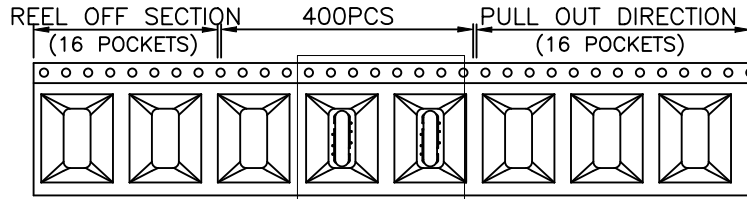

SEE DETAIL X



1



每盘装400PCS


贴上美纹胶
3PCS

每盘装400PCS, 并贴上3PCS美纹胶, 然后贴上客户要求的标签




2

VACUUM BAG
每箱装10(盘)




2PCS 隔板

4PCS护角板

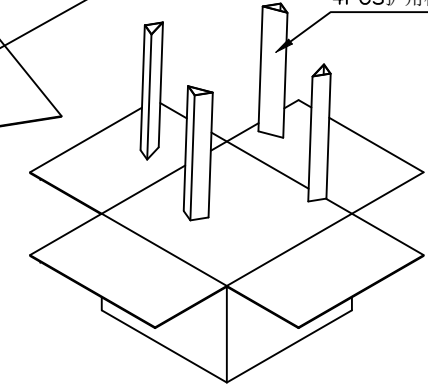



3

用封箱胶纸将内箱口於“工”字型封好。



备注:

1. 每盘装400PCS, 并贴上3PCS美纹胶, 然后贴上对应的产品标签。
2. 纸箱底部先垫一隔板, 并在内箱四个内角各放置一个三角架, 把10卷(4000PCS)封装好的产品标签一律朝上平放进纸箱中上层盖上一隔板, 再用封箱胶纸将内箱口於“工”字型封好。

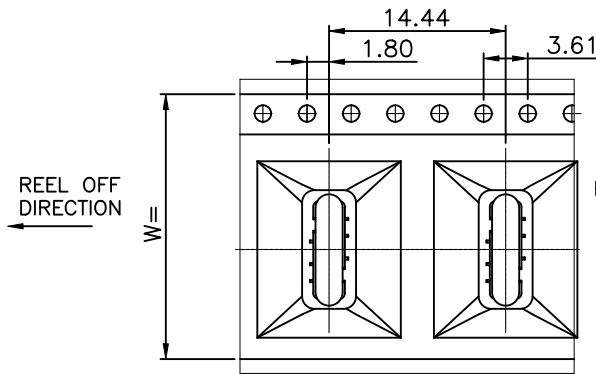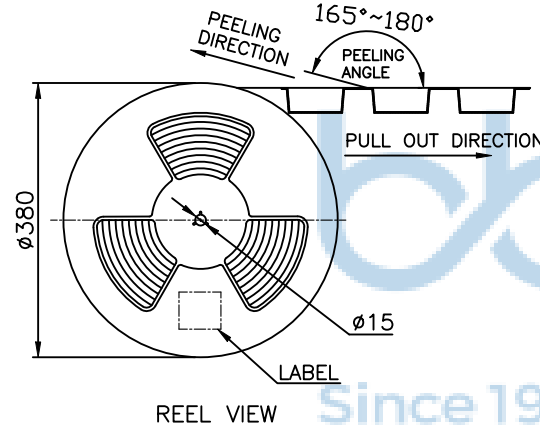

DETAIL X
SCALE 2:1



包装数量:

	REEL/TRAY	CARTON
CONNECTOR (PCS)	400	4000

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.



深圳市步步精科技有限公司

.X: ±0.38 X': ±3"
.XX: ±0.25 .X': ±2"
.XXX: ±0.13 .XX': ±1"

NAME: TYPE-C 6P 公头 直立式 铆合款 端子SMT
四脚插 带柱 H=11.1 不锈钢外壳 编带

APPD JM_Zheng

PJ NO: 126-124-060001-N5G

CHKD LYX

SIZE:A4 DRW NO:

PDWG NO:0366-2

DR GZY

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2