

备注：

1. 材质:
 1. 1胶芯: LCP+30%G. F UL94V-0
 1. 2端子: C2680, T=0.20mm; 镀半金锡
 1. 3外壳: 不锈钢, T=0.15mm; 表面镀镍
 1. 4卡钩: 不锈钢, T=0.40mm; 表面镀锡
 2. 主要特性:
 2. 1额定电流: 3A
 2. 2接触阻抗: 40mΩ MAX
 2. 3绝缘阻抗: 100MΩ MIN 250V DC
 2. 4耐压测试: 100V AC
 2. 5沾锡性: 温度245±5°C
 2. 6整体插入力: 2.0kgf MAX
整体拔出力: 0.8kgf MIN
耐久后拔出力: 0.6kgf MIN
 2. 7使用寿命: 10000次
 2. 8工作温度: -25°C ~ +80°C

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME




RECOMMENDED P.C.B LAYOUT TOP VIEW
TOI FRANCE UNSPECIFIED ±0.05mm



深圳市步步精科技有限公司

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION
PDWG,NO: 0366-

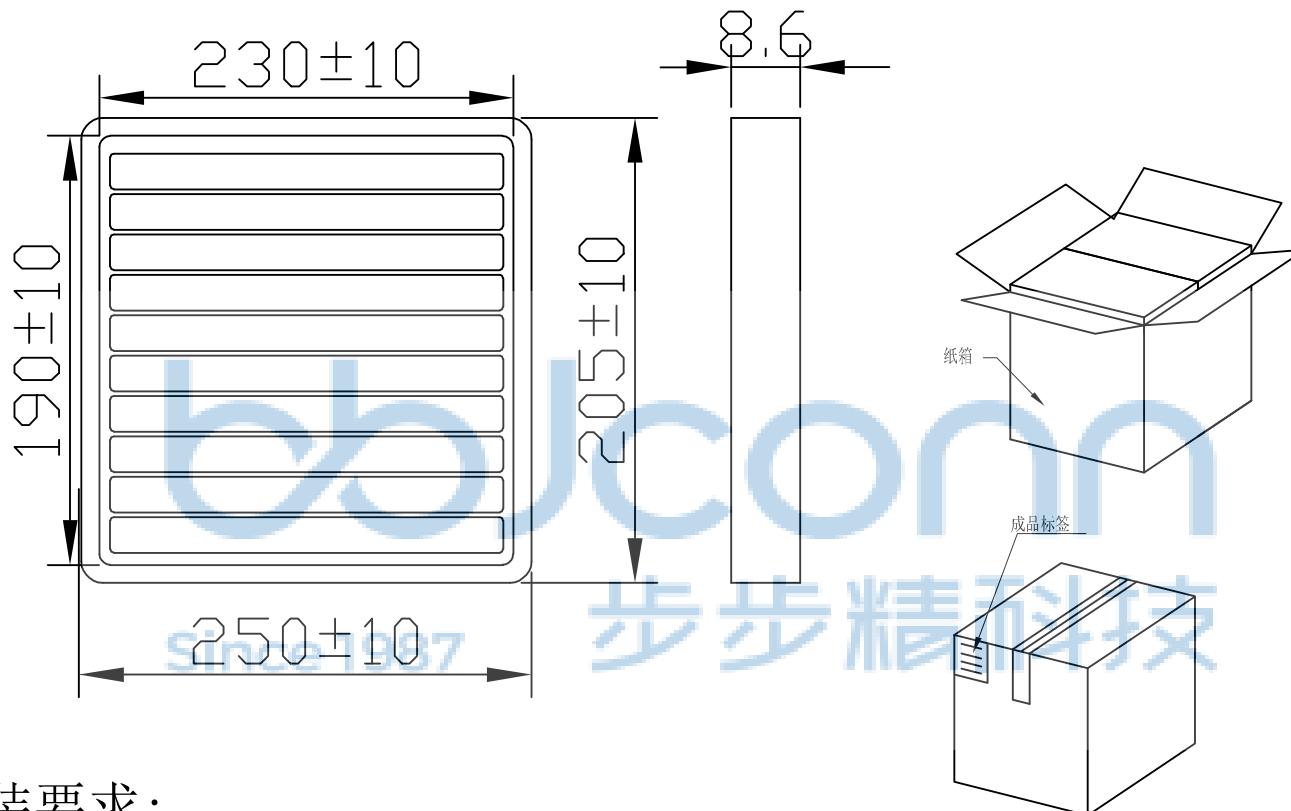

1. 包装要求:

1. 1 每盒吸塑盒包装100pcs;
1. 2 每20盒放一箱, 共计2000PCS;
1. 3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		APPD. JM_Zheng		NAME: TYPE-C 16P 公头 直立式 贴片 SMT H=8.50 卡勾6.70	
.X: ±0.38	.X': ±3'	.XX: ±0.25	.X': ±2'	.XXX: ±0.13	.XX': ±1'
APPD.	JM_Zheng	CHKD.	LYX	P.J. NO.:	126-124-160001-N5G
PDWG.NO:	0366-2	DR.	TSP	SIZE:	A4 DRW NO.: