

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

备注:

1. 材质:

1.1 胶芯: LCP+30%G.F

1.2 端子: C18140, T=0.15mm; 镍底, 镀金

1.3 外壳: 不锈钢, T=0.30mm; 表面镀镍

2. 主要特性:

2.1 额定电流: 3A

2.2 接触阻抗: 40mΩ MAX

2.3 绝缘阻抗: 100MΩ MIN 250V DC

2.4 耐压测试: 100V AC



2.5 沾锡性: 温度250±5℃, 时间5±0.5s

2.6 整体插入力: 2.0kgf MAX



整体拔出力: 0.6kgf MIN

2.7 使用寿命: 5000次

2.8 工作温度: -30℃~+80℃

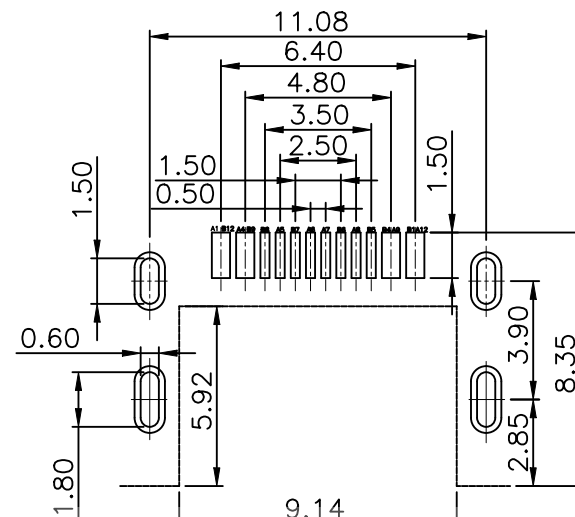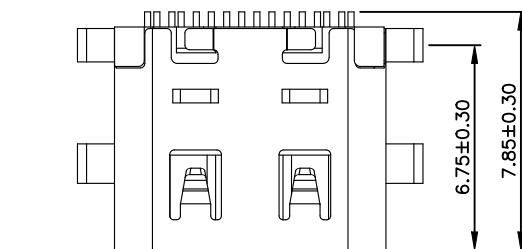


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

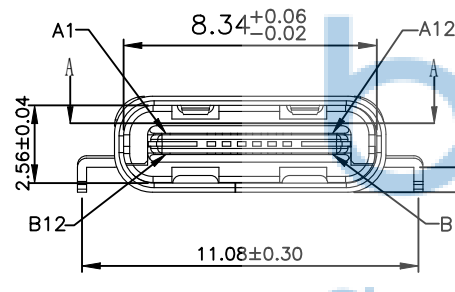

PIN ASSIGNMENT:





Pin No.	Signal Name	Pin No.	Signal Name
A1	CND	B12	CND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	CND	B1	CND

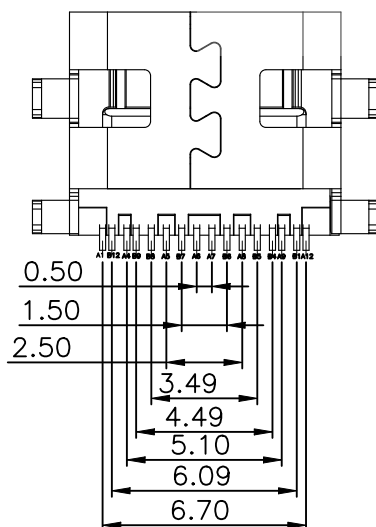

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0366-2

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: TYPE-C 16PIN 母座 四脚插 端子SMT 有弹 沉板0.80 L=7.35 CH=0.77	
APPD.	JM_Zheng	PJ. NO.: 126-221-160018-N5G		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR.	TSP	SCALE: N/A		REV.: A0	UNIT: mm
				PAGE: 1/2	

深圳市步步精科技有限公司

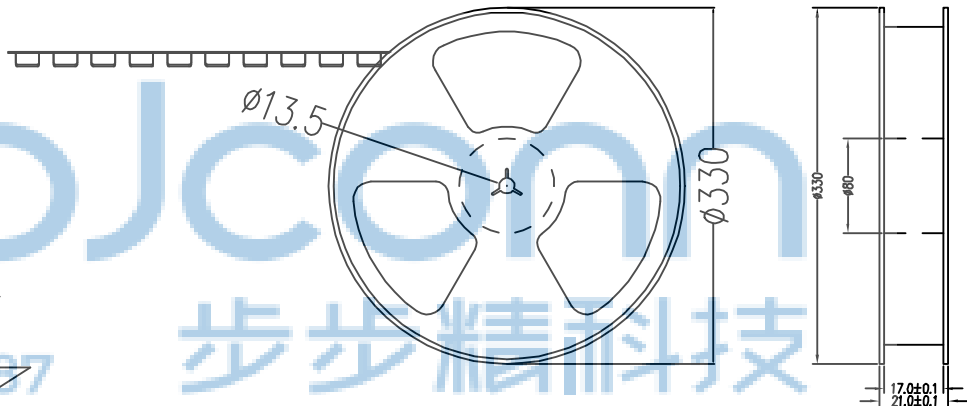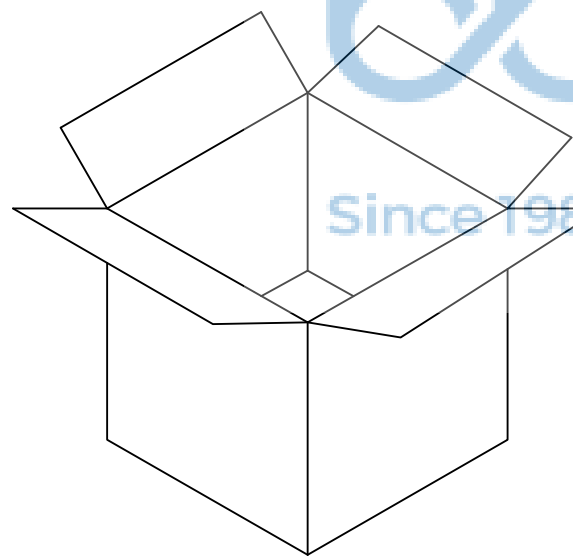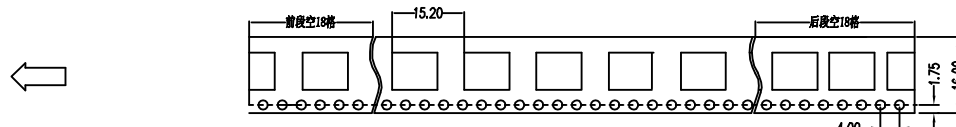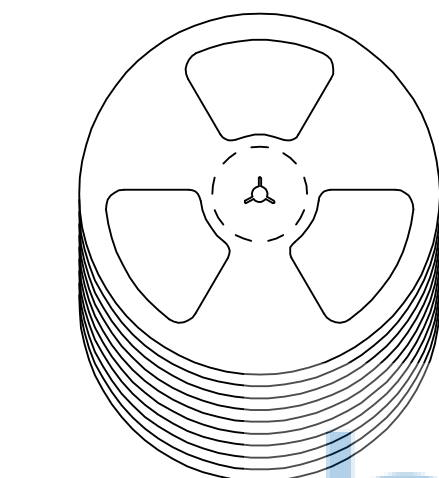

备注:

1. 包装数量: 1000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0366-2		深圳市步步精科技有限公司		NAME:TYPE-C 16PIN 母座 四脚插 端子SMT 有弹 沉板0.80 L=7.35 CH=0.77	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	APPD.	JM_Zheng	PJ. NO.:	126-221-160018-N5G
CHKD.	LYX	SIZE: A4	DRW NO.:	FINISH: SEE NOTES	MAT'L.: SEE NOTES
DR.	TSP	SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 2/2