

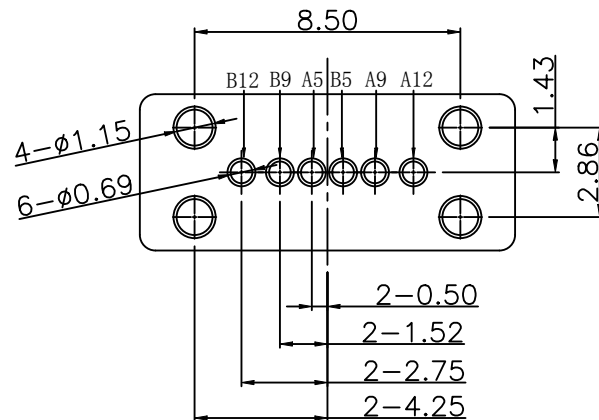
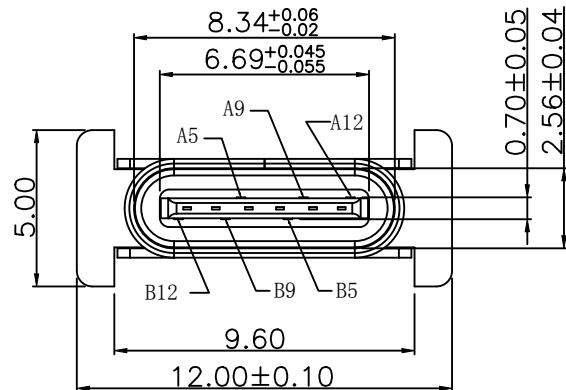
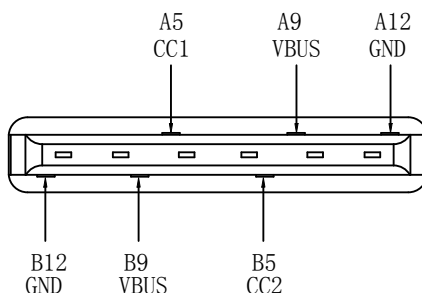


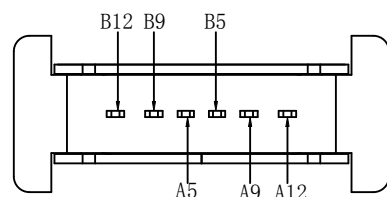

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

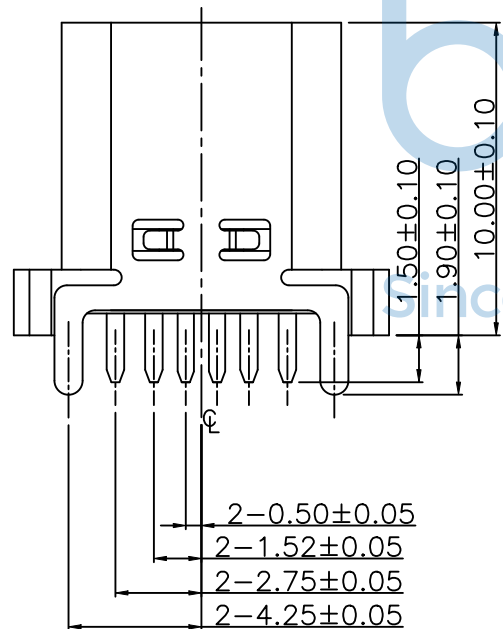

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTES:

特性: Specifications

电器 Electrical:

接触阻抗: 初始最大不超过 $40\text{m}\Omega$ Max, 测试后变化值不超过 $10\text{m}\Omega$ Max

耐电压: AC200V 60S/MIN, 0.5mA

Max: DC500V, 60S/MIN, 100Ω Max

绝缘阻抗: 100M ohms MIN

额定电流: 3A MAX

额定电压: 15V MAX

材料: Material:

Molding: LCP料黑色耐高温塑胶

端子: C7025 T=0.20mm

外壳: SUS201 T=0.30mm

电镀规格:

端子: 半金锡, 接触点镀金 $1\text{u}''$, 焊线处镀雾锡 $40-80\text{u}''$.

外壳: 镀镍 $80\text{u}''$

环保要求: ROHS, REACH标准.



USB TYPE-C PIN ASSIGNMENTS


A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0366-2

深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$ X'': $\pm 2'$ XX': $\pm 1'$	NAME: TYPE-C 6P 母座 直立式 四脚插 端子DIP 高导铜C7025 H=10.0 定制款 盒装
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: 126-225-060002-N5G
DR. TSP		SIZE: A4 DRW NO.:
		FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

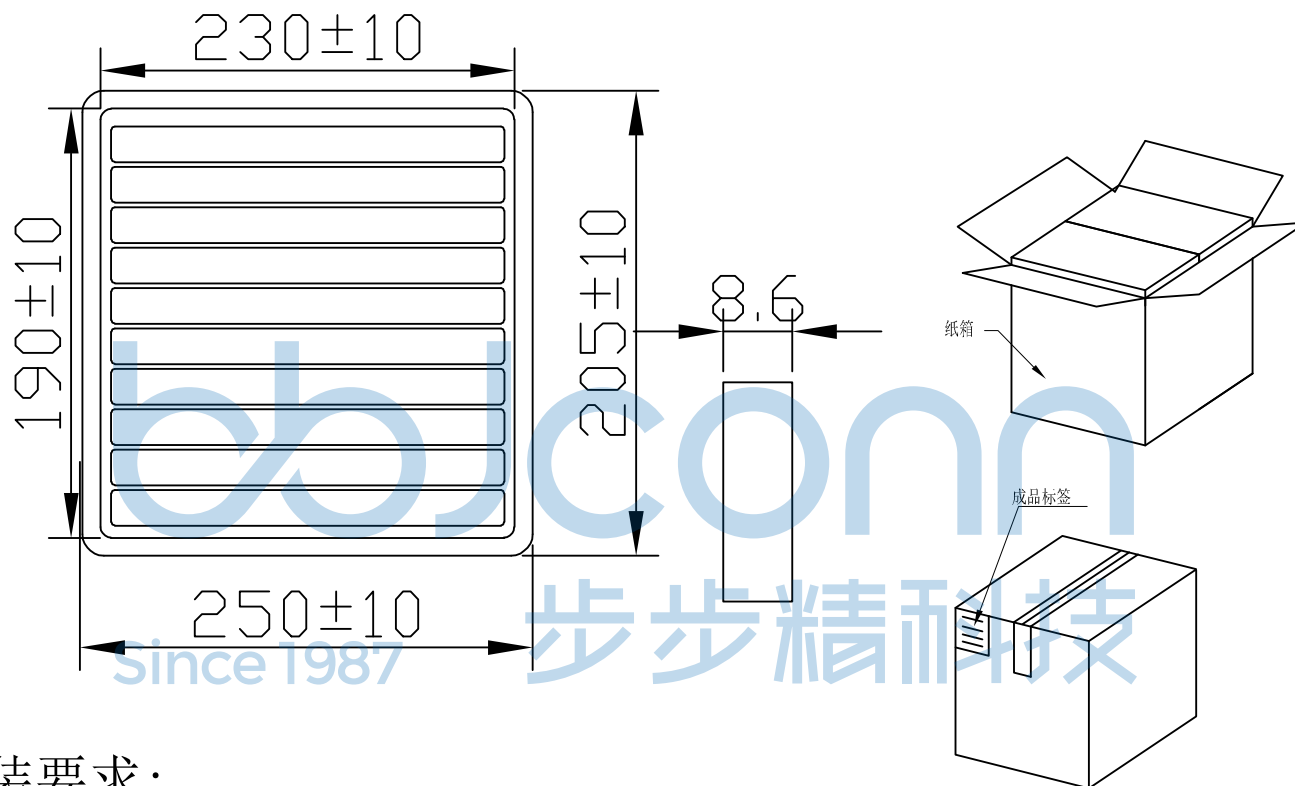

纸箱规格: 350*210*290

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0366-2		深圳市步步精科技有限公司				
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" X'X': ±1"		
			NAME:TYPE-C 6P 母座 直立式 四脚插 端子DIP 高导电C7025 H=10.0 定制款 盒装			
	APPD.	JM_Zheng			PJ. NO.: 126-225-060002-N5G	
	CHKD.	LYX			SIZE: A4 DRW NO.:	
				FINISH: SEE NOTES		MAT'L.: SEE NOTES
			SCALE: N/A REV.: A0		UNIT: mm	PAGE: 2/2