
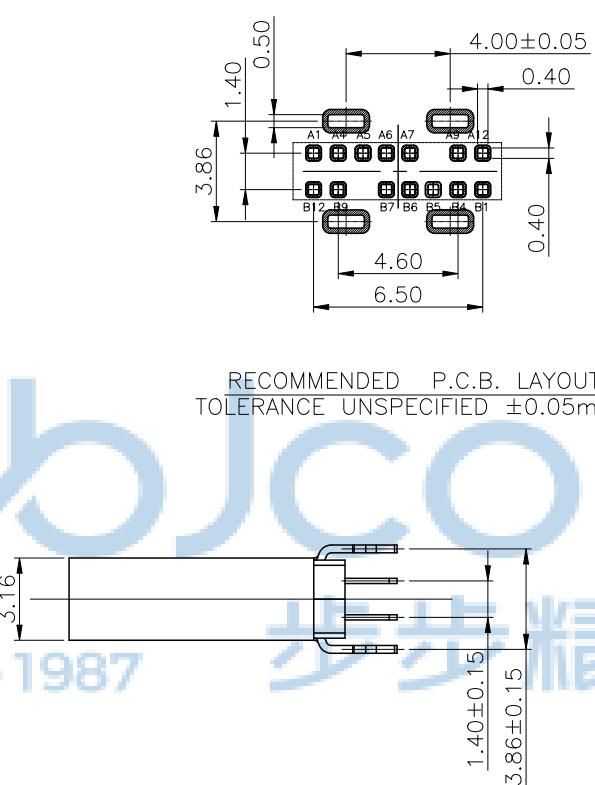


备注:

1. 材质及电镀: 见附表1
2. 电气性能:
 - 2.1 接触电阻: 30mΩ Max FOR INITIAL. 40mΩ Max AFTER TEST.
 - 2.2 耐电压: 100V AC
 - 2.3 绝缘: 100MΩ Min
 - 2.4 额定电流: COLLECTIVELY VBUS PIN (A4, A9, B4, B9), TOTAL 5A
VCCON PIN (B5) THROUGH GND
PIN(A1, A12, B1, B12), 1.25A
OTHERS PIN, 0.25A
 - 2.5 工作温度: -40° C ~ 80° C.
3. 机械性能:
 - 3.1 插入力: 5~20N.
 - 3.2 拔出力: 初始值8~20N测试后6~20N
 - 3.3 寿命: 10,000 CYCLES



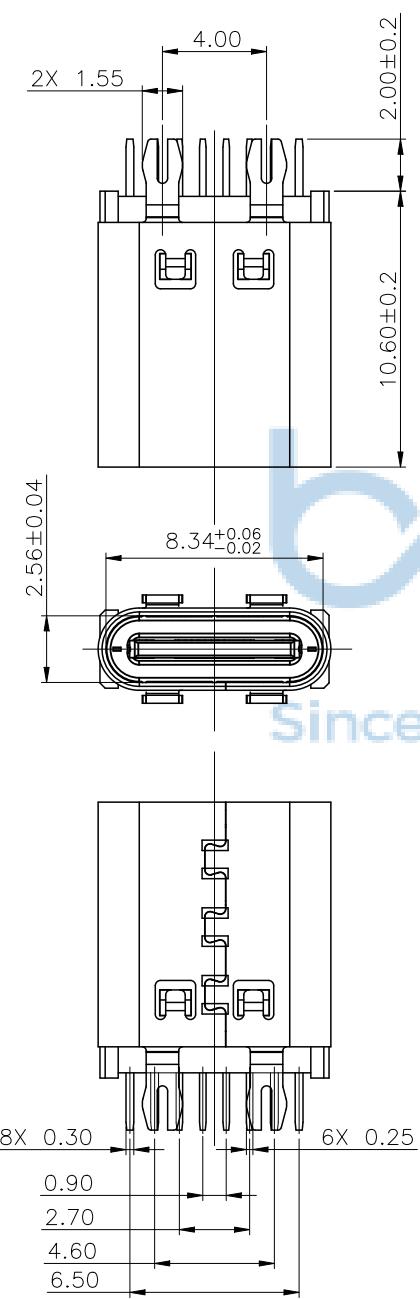


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	DN2
A6	DP1	B6	DP2
A7	DN1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

序号	品名	材质	用量	备注
05	外壳	不锈钢	1	
04	二次Molding件	LCP	1	黑色 UL94 V-0
03	一次Molding件	LCP	1	黑色 UL94 V-0
02	中夹片	SUS301-H T=0.15	1	不电镀
01	端子	C7025-H T=0.15	1set	功能接触区镀金, 焊脚镀亮镍

THIS DOCUMENT IS THE SOLE PROPERTY OF BBjconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.	APPD	JM_Zheng	X: ±0.38 XX: ±0.25 XXX: ±0.13	X': ±3° X": ±2° X": ±1°	NAME: TYPE-C 14P 母座 直立式 四脚插 鱼叉脚 H=10.60 端子DIP 带中夹片 编带
	CHKD	LYX			PJ NO: 126-225-140012-N5G SIZE:A4 DRW NO: FINISH:SEE NOTES MAT'L:SEE NOTES SCALE:N/A REV:A0 UNIT:mm PAGE:1/2
			PDWG NO: 0366-2	DR SGF	

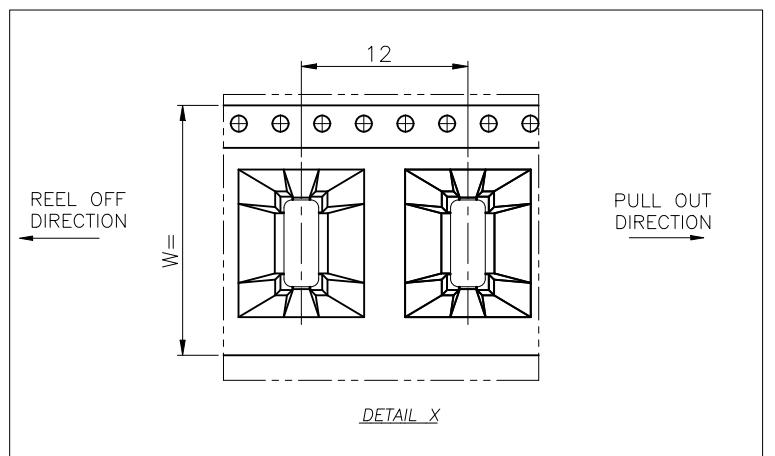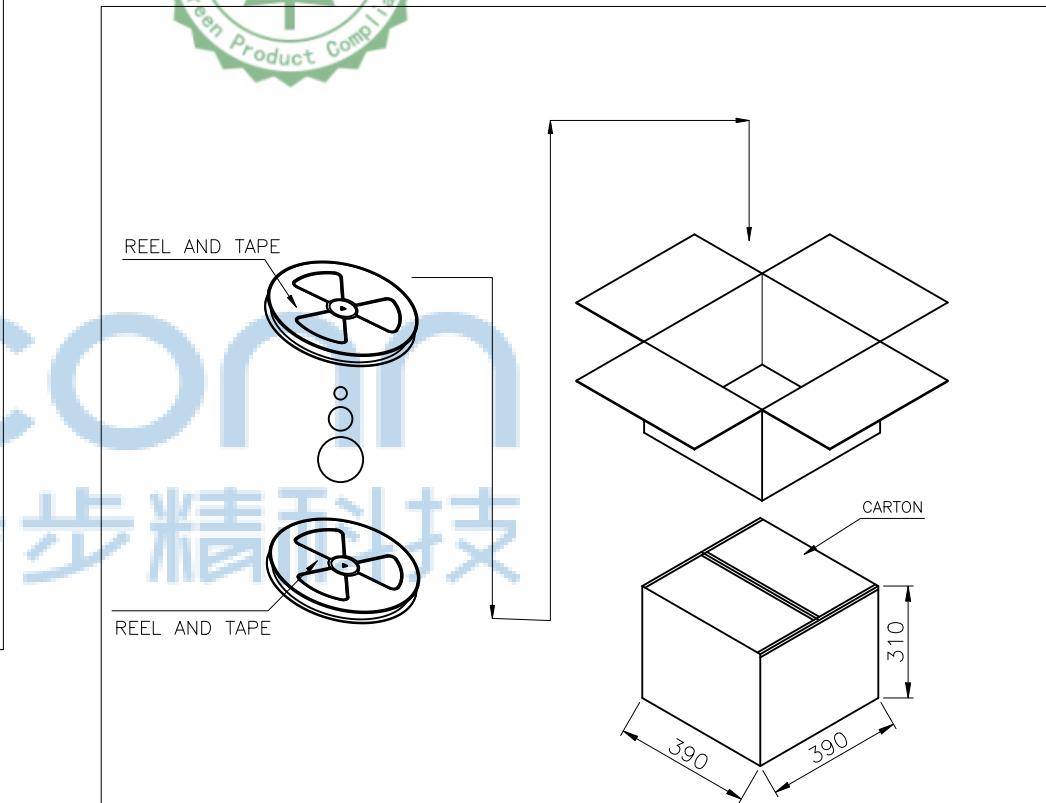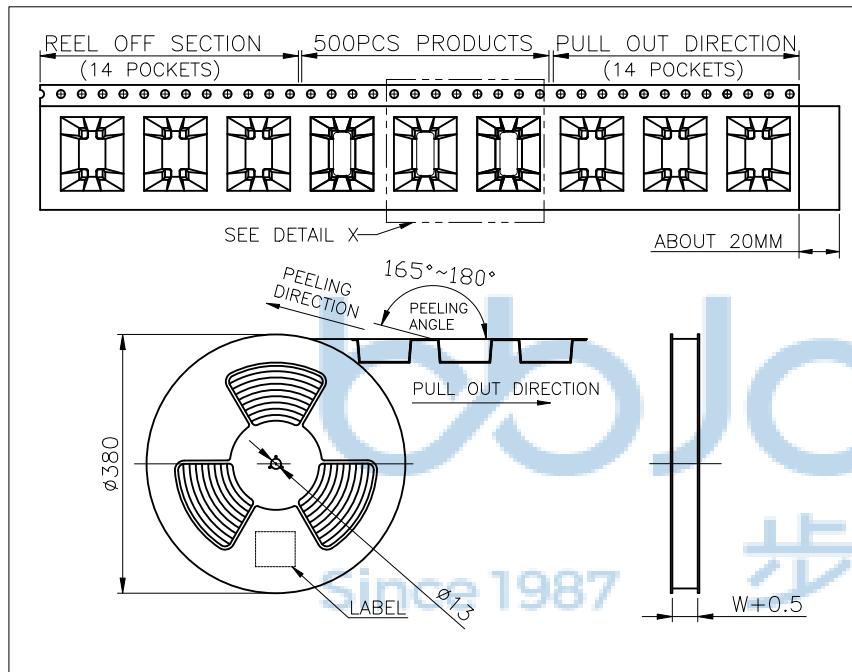

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

.X: ±0.38	X: ±3°	NAME: TYPE-C 14P 母座 直立式 四脚插 鱼叉脚
.XX: ±0.25	.X: ±2°	H=10.60 端子DIP 带中夹片 编带
.XXX: ±0.13	.XX: ±1°	
APPD	JM_Zheng	PJ NO: 126-225-140012-N5G
CHKD	LYX	SIZE:A4 DRW NO:
PDWG NO: 0366-2	DR	FINISH:SEE NOTES MAT'L:SEE NOTES
	SGF	SCALE:N/A REV:A0 UNIT:mm PAGE:2/2