

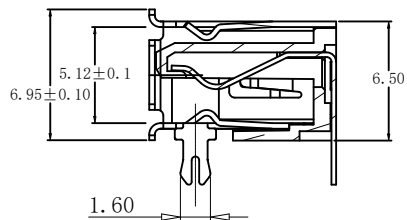


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	ZY

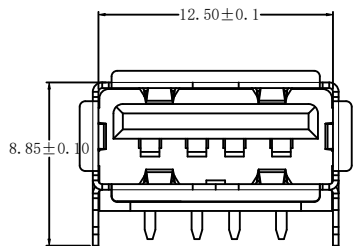

SECTION A-A

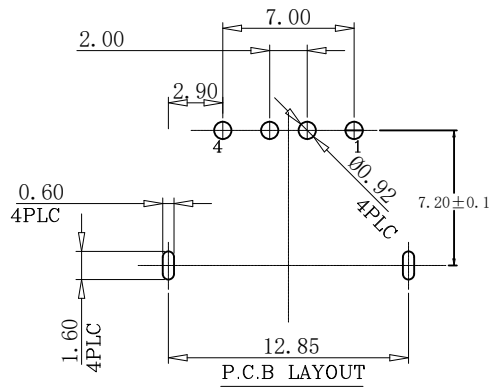

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:





1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature Thermoplastics,
PA66
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC



电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating

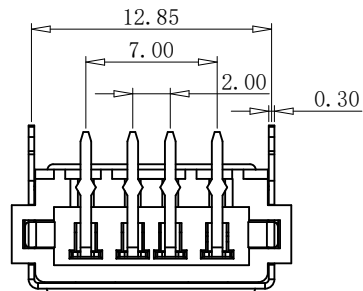

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程 部	
PDWG.NO: 0383-1	APPD. JM_Zheng	NAME: USB 2.0 AF 90度 短体 L=10.0 H=6.5 前两脚插 端子DIP 卷边 PA66黑胶 铜壳 接触镀金30u" 盒装	PJ. NO.: 127-272-040073-W7G
	CHKD. LYX	SIZE: A4	DRW NO.:
	DR. ZY	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	ZY

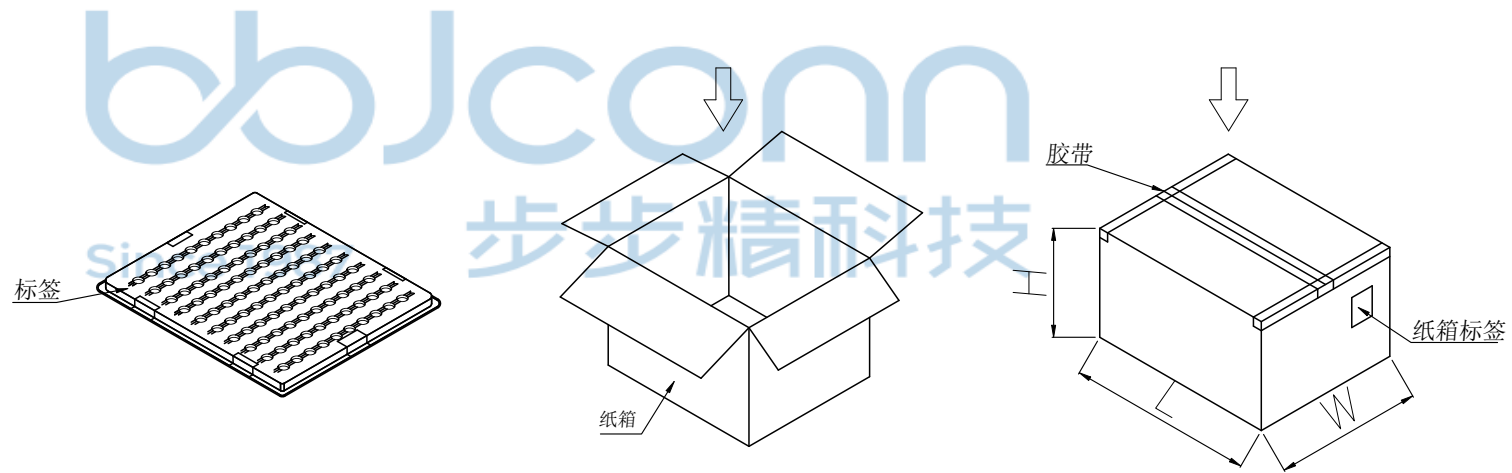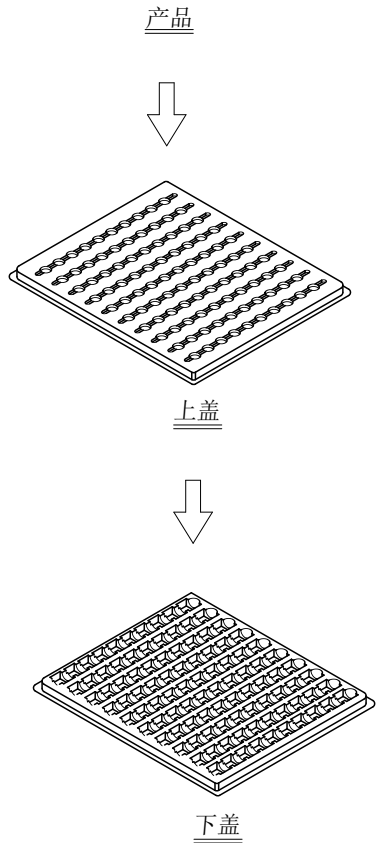

纸箱规格: L350*W210*H290

- 1、包装要求:
- 1.1 每盒吸塑盒包装100pcs;
 - 1.2 纸箱外贴上标签。



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME: USB 2.0 AF 90度 短体 L=10.0 H=6.5 前两脚插 端子DIP 卷边 PA66黑胶 铜壳 接触镀金30u" 盒装	
APPD.	JM_Zheng		PJ. NO.: 127-272-040073-W7G		
CHKD.	LYX		SIZE: A4 DRW NO.:		
PDWG.NO:	0383-1	DR.	ZY	FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A	REV.: A0
				UNIT: mm	PAGE: 2/2