

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

规格型号: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:







- 插拔力: Connector Mate and Unmate Force
Mate Force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)

原材料: Material:


- 塑膠: Housing:
Hing Temperature Ternmaplastics,
PBT/LCP White/Black
- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy SPCC

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
端子镀60U"(MIN) 锡; 50U"(MIN) Ni;
测点镀金Au 3u"/Copper tin
- 外壳: Shell:
外壳四周镀60U"(MIN) Ni, 60U"(MIN) Cu
Nickel Plating

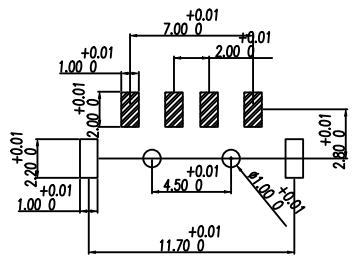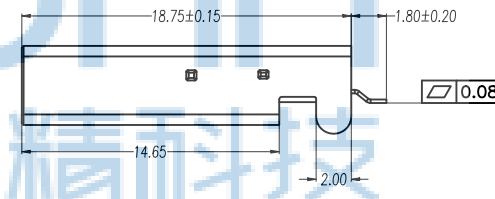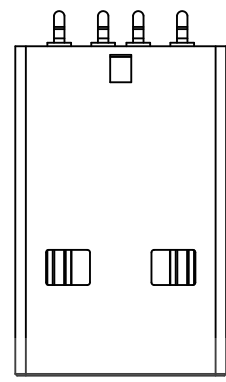


RECOMMENDED P.C.B LAYOUT



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
PDWG.NO: 0383-1

深圳市步步精科技有限公司		NAME: USB 2.0 公头 180度 卧式直插 L=18.75 沉板1.3 带柱 端子SMT 平口 LCP黑胶 铁壳 盐雾24H 接触区镀金3u 盒装	
APPD.	JM_Zheng	PJ. NO.: SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR.	SGF	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

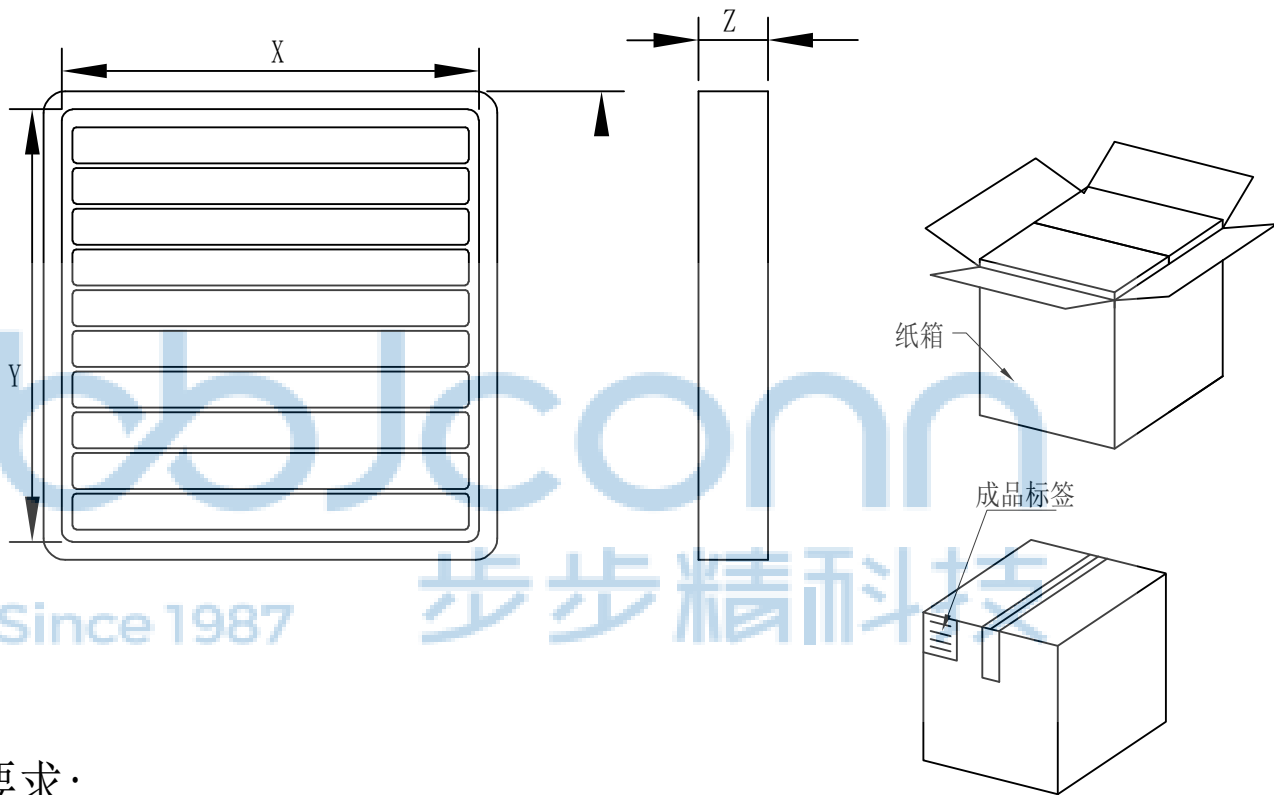

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签。

纸箱规格: 350*210*290



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0383-1		深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X': ±3" X'': ±2" XX': ±1"		NAME: USB 2.0 公头 180度 卧式直脚 L=18.75 沉板1.3 带柱 端子SMT 平口 LCP黑胶 铁壳 盐雾24H 接触区镀金3u 盒装	
APPD.	JM_Zheng	PJ. NO.:		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR.	SGF	SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 2/2