REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

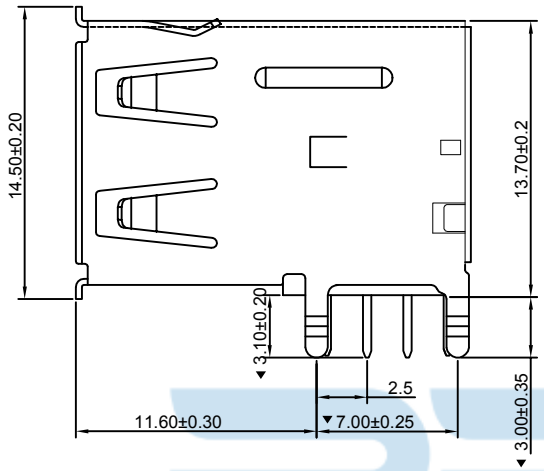

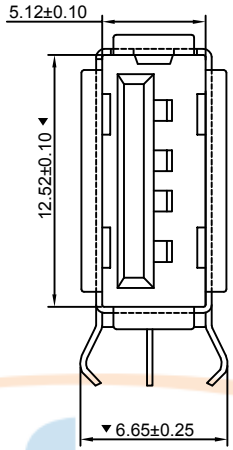

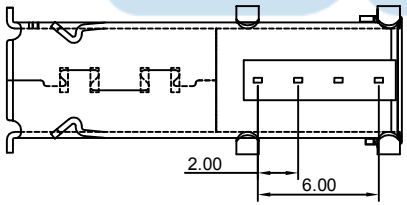



PCB Layout

NOTE:

1. MATERIAL:
1-1. HOUSING:PBT/LCP GF UL94 V-0
1-2. CONTACT:Copper Alloy T=0.25±0.02mm
(SURFACE PLATING:Au 6 U"+Sn60-100U"+Ni40U")
1-3. SHEEL:SPCC/C2680
(SURFACE PLATING:Cu60-100U"+Ni80-110U")
2. ELECTRICAL CHARACTERISTICS
2-1. CONTACT RESISTANCE: 20 milliohms MAX.
2-2. INSULATION RESISTANCE: 1,000 Megohms MIN.
2-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN
2-4. OPERATION TEMPERATURE:-20° C TO +85° C
RoHS Compliant

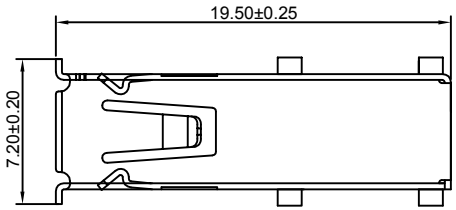

TOLERANCE UNSPECIFIED
.
.0 ±0.35
.00 ±0.25
.000 ±0.15
X.° ±2.00°
CUSTOMER DRAWING

深圳市步步精科技有限公司

TITLE: USB 2.0 母座 侧插弯脚长体 L=19.50 H=13.70 卷边 PBT白胶 铁壳 端子镀金6u

DRAWN/ DATE	设计	TSP	SIZE:A4	UNIT:MM.	PART.NO:
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准	LJP	DWG. PATH	0383-1	SHEET: 页码

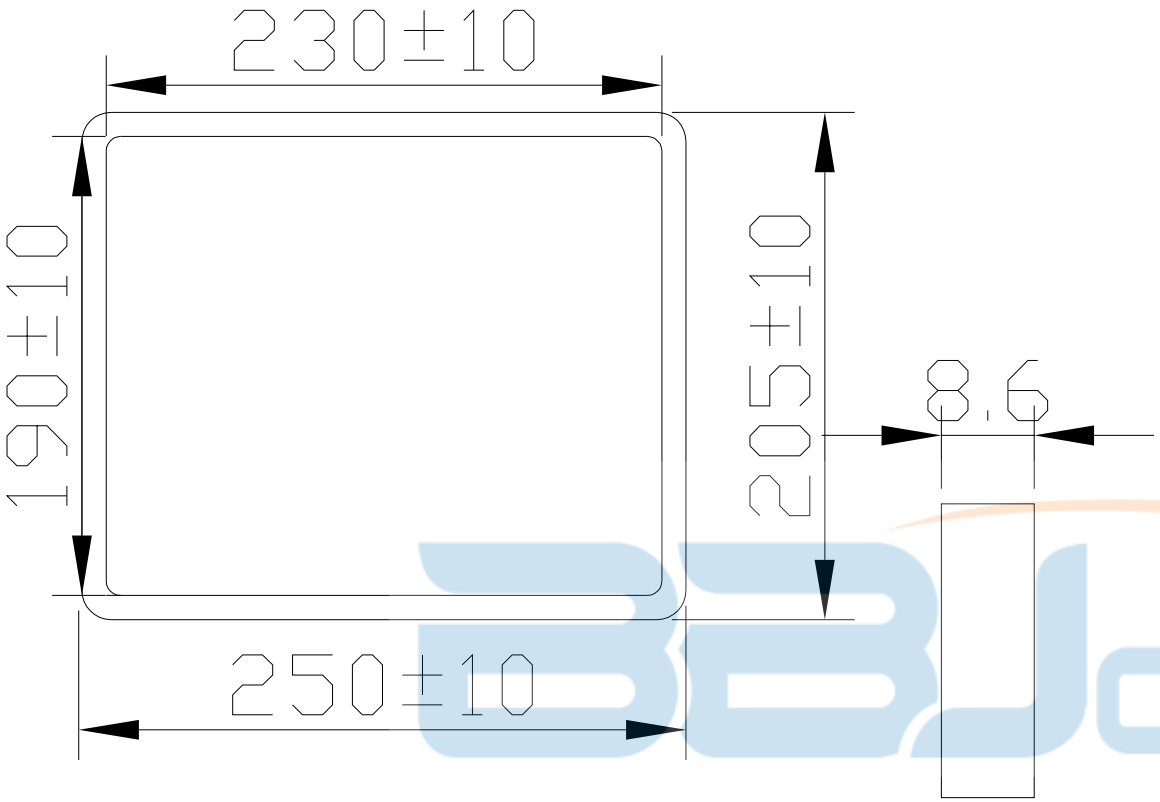

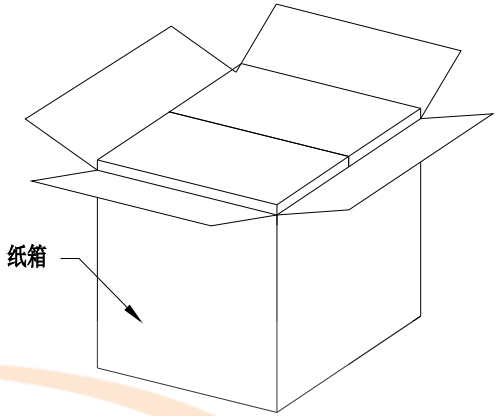

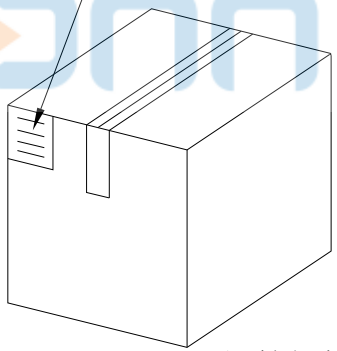

纸箱规格：350*210*290

1.包装要求：

1.1 每盒吸塑盒包装100 pcs；

1.2 每20盘放一箱，共计2000PCS；

1.3 纸箱外贴上标签

TOLERANCE UNSPECIFIED . .0 ±0.35 .00 ±0.25 .000 ±0.15 X.° ±2.00° CUSTOMER DRAWING			深圳市步步精科技有限公司			
			TITLE: USB 2.0 母座 侧插弯脚长体 L=19.50 H=13.70 卷边 PBT白胶 铁壳 端子镀金6u			
DRAWN/ DATE	设计	TSP	SIZE:A4	UNIT:MM.	PART.NO:	
CHECKED/ DATE	审核	LYX	SCALE: 1:1		PROJECTION	REV.: 版本
APPROVED/ DATE	核准	LJP	DWG. PATH		0383-1	SHEET: 页码