








RECOMMENDED PCB LAYOUT(THK:1.0mm)



TOP VIEW TOLERANCE:±0.03

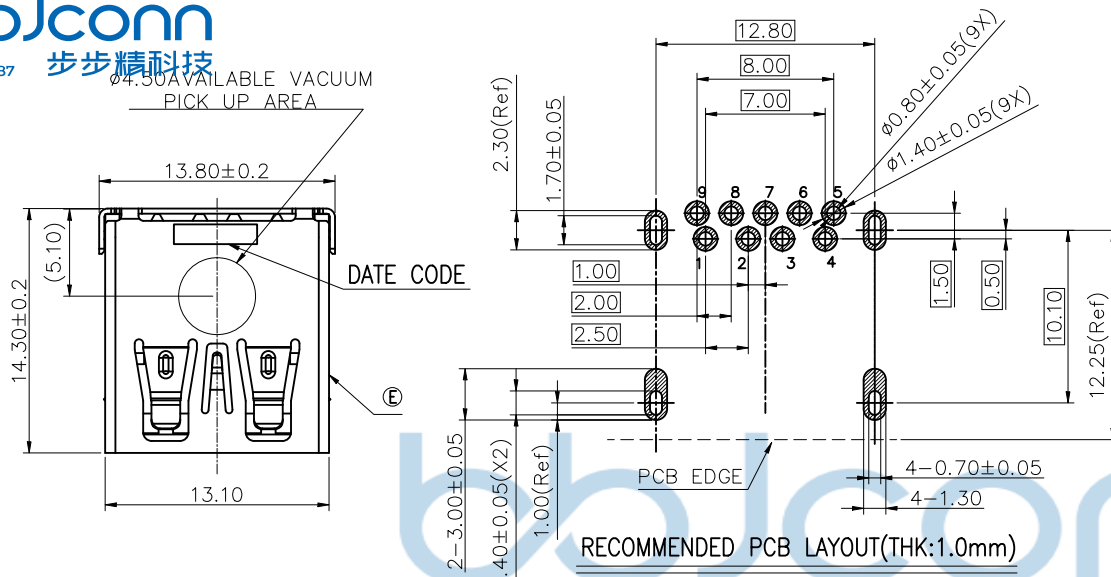

KEEP OUT AREA

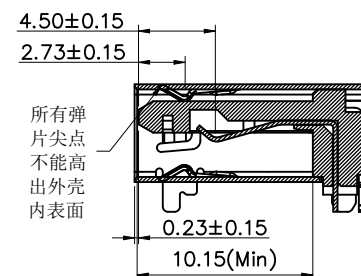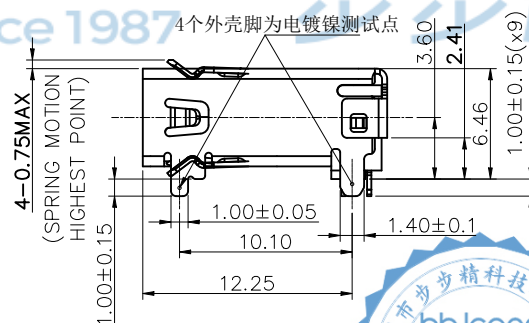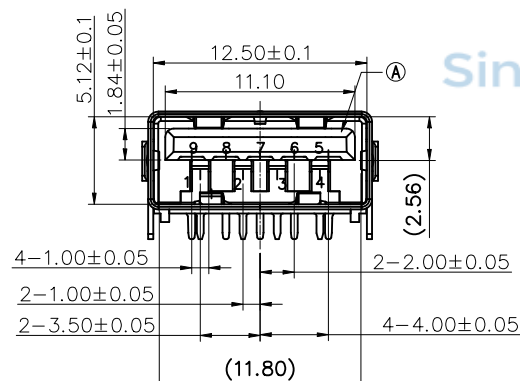

Pin Number	SIGNAL NAME
Pin1	VBUS
Pin2	D-
Pin3	D+
Pin4	GND
Pin5	StdA_SSRX-
Pin6	StdA_SSRX+
Pin7	GND_DRAIN
Pin8	StdA_SSTX-
Pin9	StdA_SSTX+
Shell	Shield

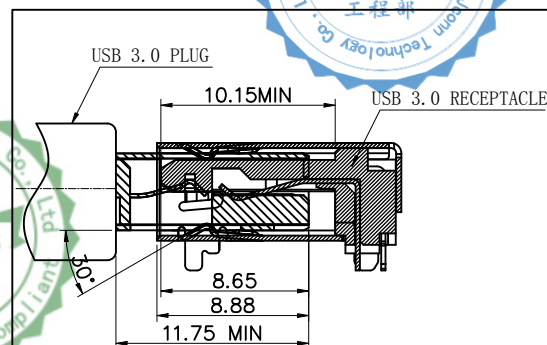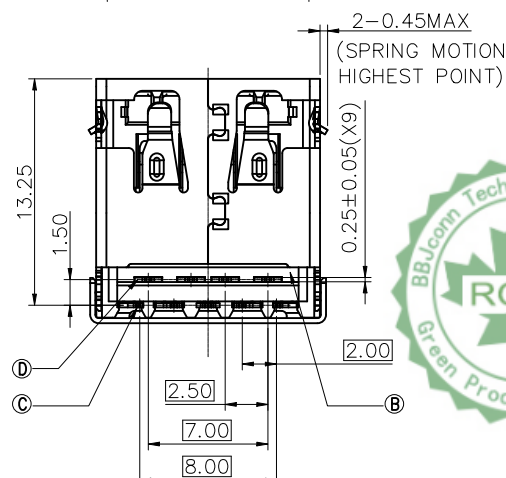

Receptacle and plug mating drawing
SCALE 1:1

⑤	SHELL	1	SUS304 1/2H T=0.30mm	ALL OVER 60u" Ni. Min
④	4P TERMINAL	4	C5210-EH T=0.25mm	Au 30u" ON CONTACT AREA; MATE Tin 40-80u" ON SOLDER AREA;ALL OVER 80u" Ni. Min
③	5P TERMINAL	5	C2680-H T=0.25mm	
②	BASE	1	PA9T UL94V-0	BLACK
①	HOUSING	1	PA9T UL94V-0	BLACK
NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 9999-9

 深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^*$	NAME: USB 3.1 DIP 6.5H 14.3L 平口 PA9T 黑胶 不锈钢壳 端子镀 金30u
.XX: ± 0.25	.X*: $\pm 2^*$	
.XXX: ± 0.13	.XX*: $\pm 1^*$	


APPD.	JM_Zheng		PJ. NO.: 127-272-090002-00G
-------	----------	---	-----------------------------

CHKD		SIZE: A4	DRW NO.: CC24-0001
------	--	----------	--------------------




CHRD:		FINISH: SEE NOTES	MAT'L: SEE NOTES
PS	10-15		

DR.	Luck Tao	SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/
-----	----------	------------	----------	----------	----------

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

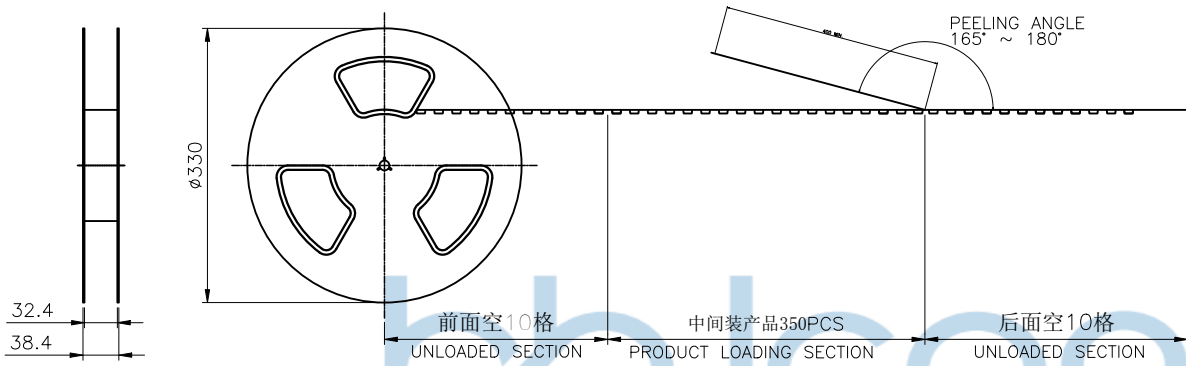

USER DIRECTION OF UNREELING

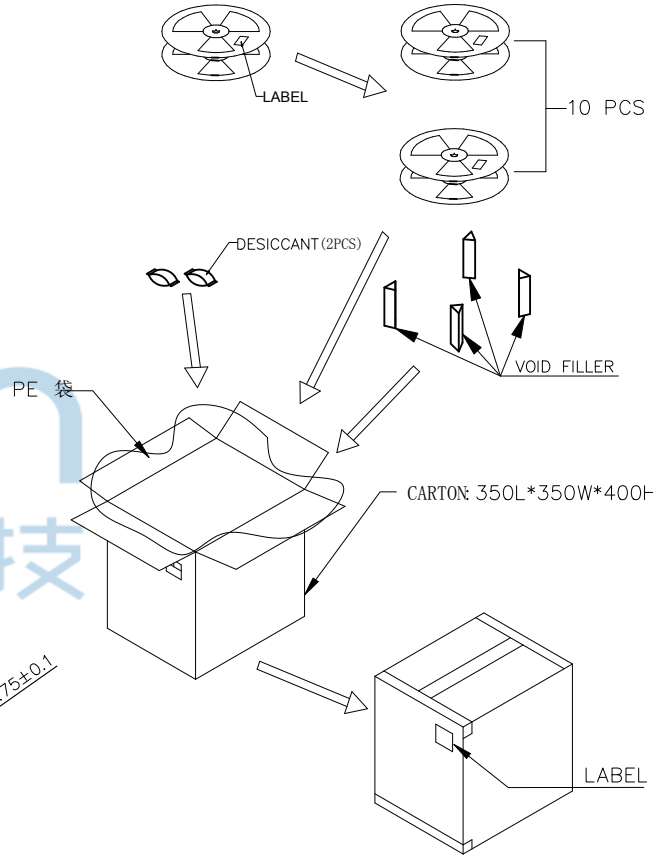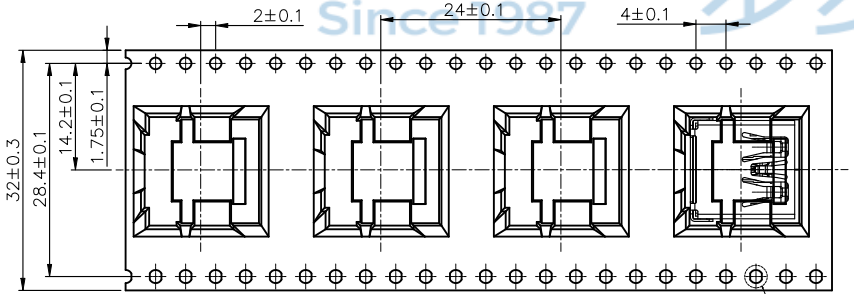

NOTE:

- MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, TRANSPARENT COLOR.
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
- PEELING SPEED: 300 mm/min.

350	10	3500 PCS	--KG	--KG	1.38g
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT	SINGLE WEIGHT



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' .X': ±2' .XX': ±1'	
NAME:		USB 3.1 DIP 6.5H 14.3L 平口 PA9T 黑胶 不锈钢壳 端子镀金30u	
APPD. JM_Zheng		P.J. NO.: 127-272-090002-00G	
CHKD. TSP		SIZE: A4 DRW NO.: CC24-0001	
PDWG.NO: 9999-9		FINISH: SEE NOTES MAT'L:	
DR. LYX		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1	