

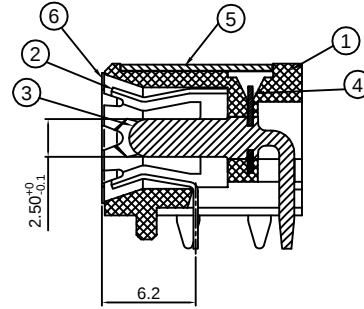






REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

规格:

- 1.额定值: DC30V 10A
- 2.接触电阻: $\leq 30m\Omega$
- 3.绝缘电阻: $\geq 100M\Omega$
- 4.耐电压: 500VAC
- 5.插拔力: 3N~30N
- 6.使用寿命: 5000次
- 7.使用温度: $-20^{\circ}C \sim +80^{\circ}C$



电路示意图

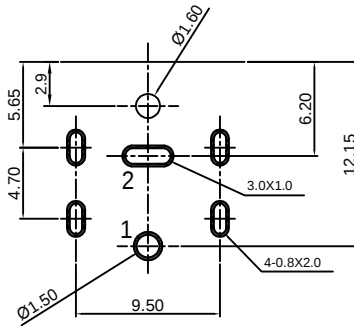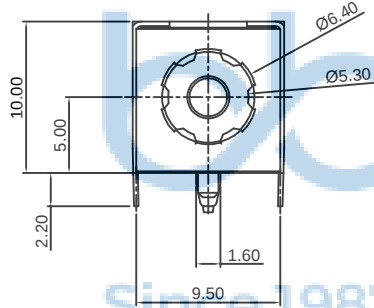




P.C.B 设计参考尺寸



6	面盖	不锈钢 T=0.1mm	1	本色
5	外壳	黄铜 T=0.3mm	1	镀铜锡
4	夹板	PA9T	1	黑色
3	PIN针	黄铜	1	镀金
2	弹片	磷铜 T=0.3mm	1	镀铜锡
1	主体	PA9T	1	黑色
序号	名称	材料	数量	颜色/电镀

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0050-2

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X*: ± 3 .X*: ± 2 .XX*: ± 1		NAME: DC0071-2.5针 镀金 直脚 五脚插 带柱 铜壳	
APPD.	JM_Zheng	23/05'02	PJ. NO.: DC.02.72-14-2001		
CHKD.	LYX	23/05'02	SIZE: A4 DRW NO.:		
DR.	SGF	23/05'02	FINISH: SEE NOTES		MAT'L.: SEE NOTES
SCALE: N/A		REV.: A3	UNIT: mm	PAGE: 1/1	

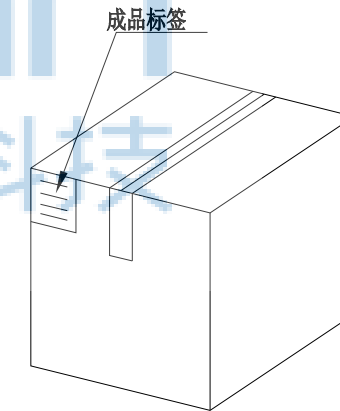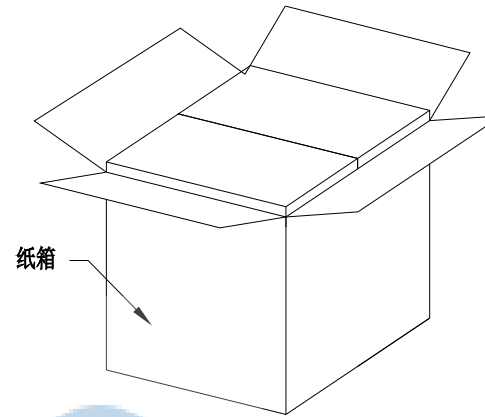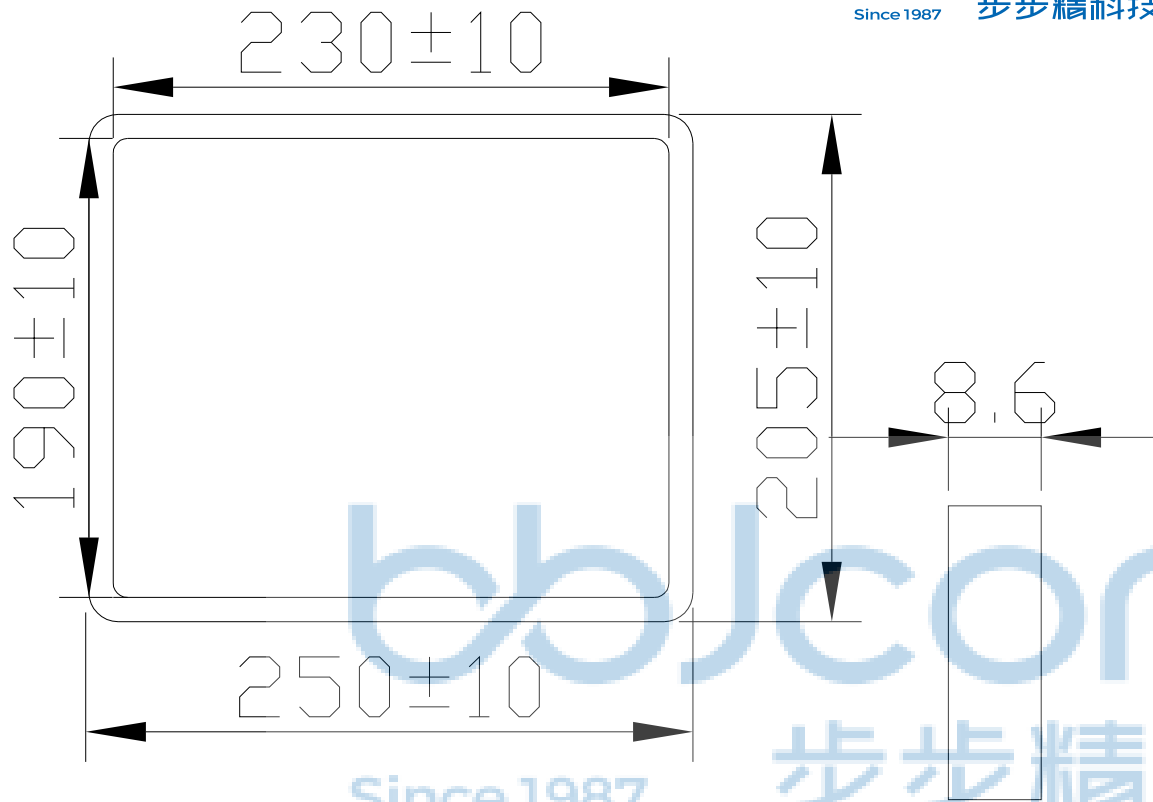

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装100 pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0050-2		 深圳市步步精科技有限公司	
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	
		.X*: ±3" .X*: ±2" .XX*: ±1"	
APPD. JM_Zheng		23/05'02	
CHKD. LYX		23/05'02	
		NAME: DC0071-2.5针 镀金 直脚 五脚插 带柱 铜壳	
			
		PJ. NO.: DC.02.72-14-2001	
		SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES	
		MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A3	
		UNIT: mm PAGE: 1/1	