


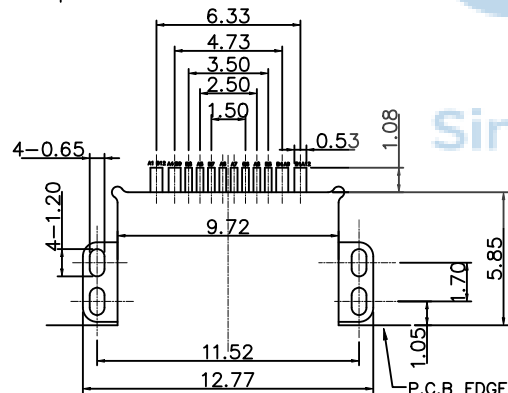

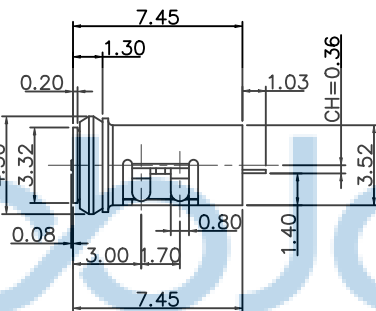
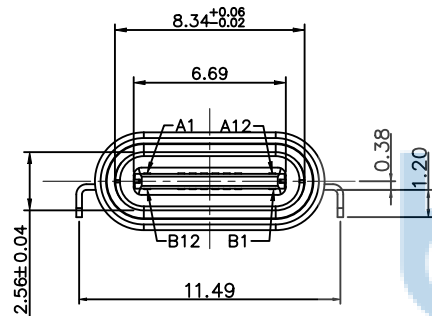


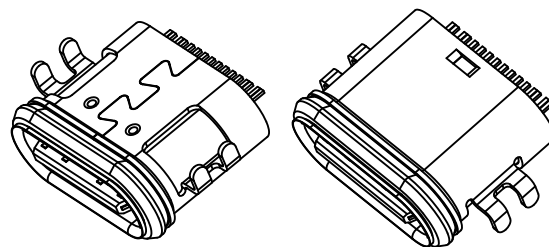

RECOMMENDED PCB LAYOUT(TOP VIEW)
DEFAULT TOLERANCE:±0.05

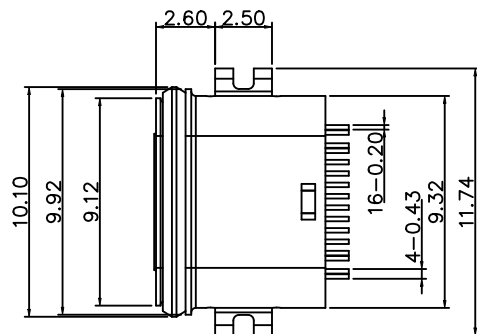

组装建议图

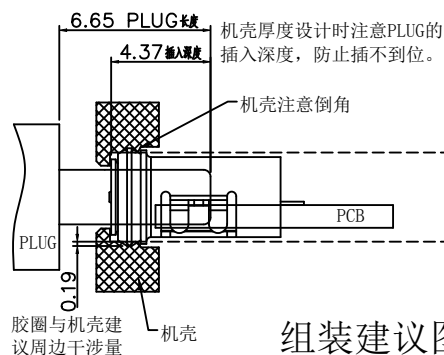


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

- MATERIAL SPECIFICATION:
 - HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.
 - CONTACTS: COPPER ALLOY
 - MID PLATE: STAINLESS STEEL
 - FRONT SHELL: STAINLESS STEEL
- MECHANICAL PERFORMANCE,
 - INSERTION FORCE: 5~20N.
 - REMOVAL FORCE: 6~20N.
 - DURABILITY: 10000 CYCLES.
- ELECTRICAL PERFORMANCE,
 - CURRENT RATING: 5.0A
VOLTAGE RATING: 20V
 - LLCR:
 - VBUS & GND PINS AND OTHER PINS: 40mΩ /PIN MAX.
 - SHIELD: 50mΩ /MAX.
 - LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - INSULATION RESISTANCE: 100MΩ MIN
 - DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25° C~+85° C.
 - IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260° C.
- WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0482-1	APPD. JM_Zheng	NAME: TYPE-C 16P 防水母座 沉板1.40 SMT 四脚插 舌片外露0.08 L=7.45 CH=0.36 方形防水圈 IPX7	PJ. NO.: 126-221-160002-H8G
	CHKD. LYX	SCALE: N/A	REV.: A0
	DR. TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		UNIT: mm	PAGE: 1/2

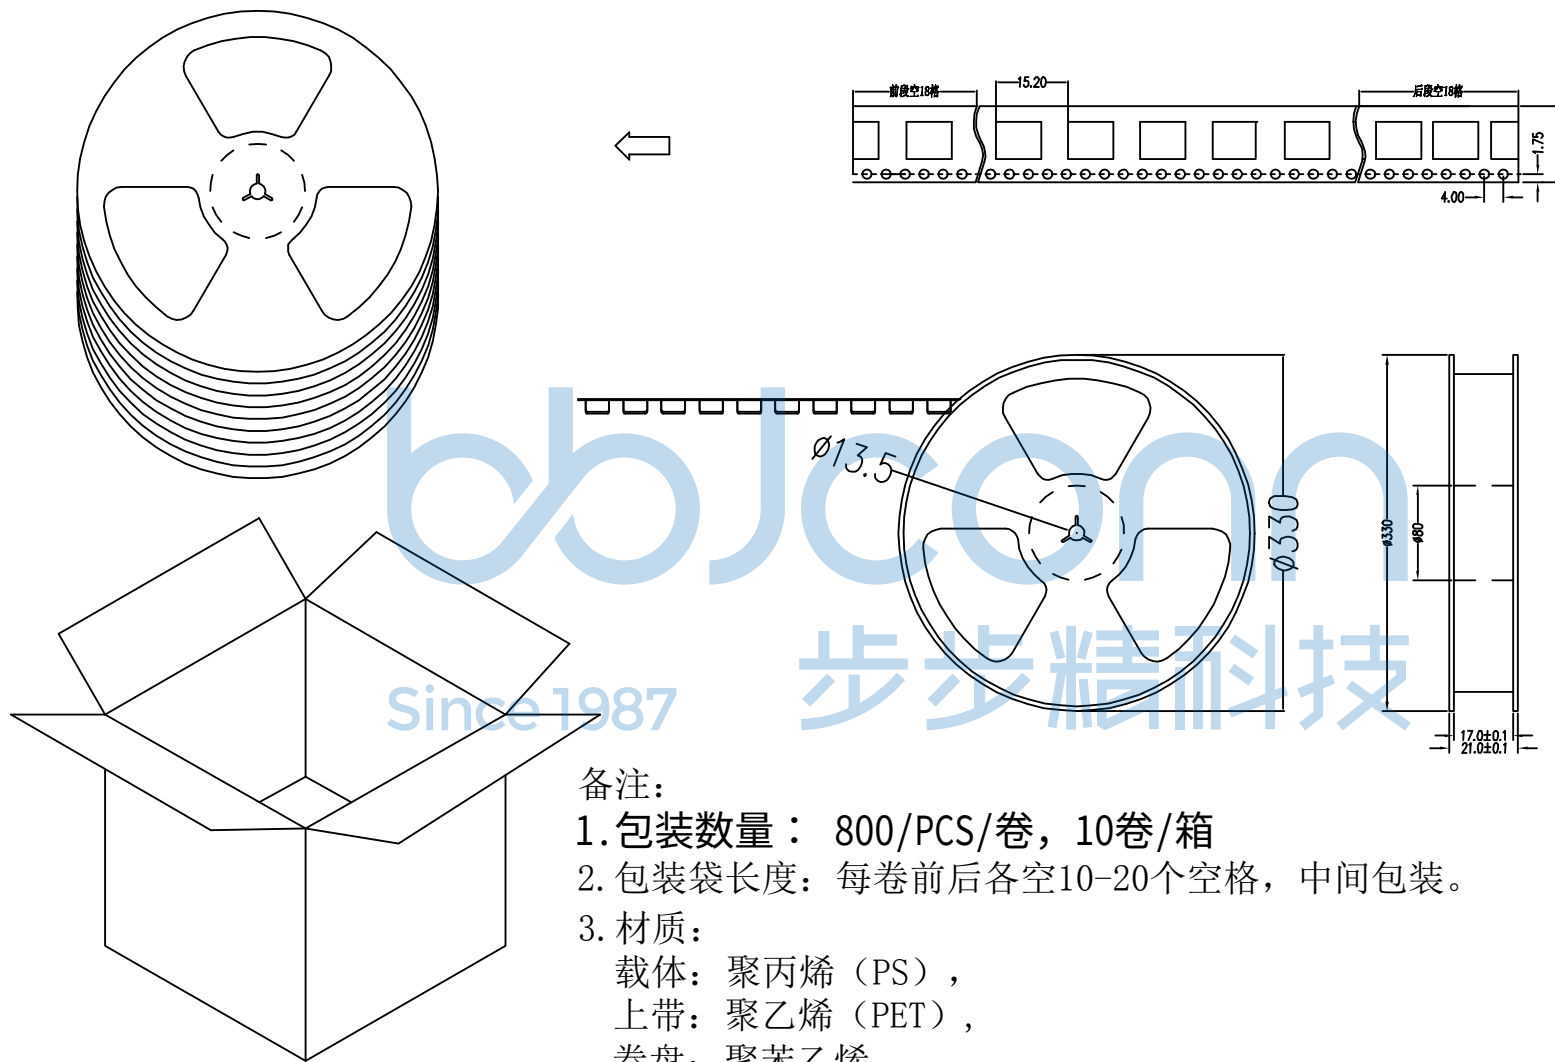

备注:

1. 包装数量: 800/PCS/卷, 10卷/箱
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS) ,
上带: 聚乙烯 (PET) ,
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38	X*: ±3"	NAME: TYPE-C 16P 防水母座 沉板1.40 SMT 四脚插	
.XX: ±0.25	.X*: ±2"	舌片外露0.08 L=7.45 CH=0.36 方形防水圈 IPX7	
.XXX: ±0.13	.XX*: ±1"		
APPD.	JM_Zheng	PJ. NO.: 126-221-160002-H8G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO:	0482-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR.	TSP	SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	