
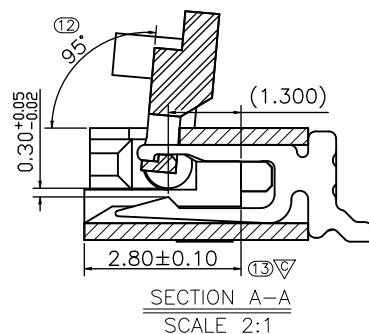


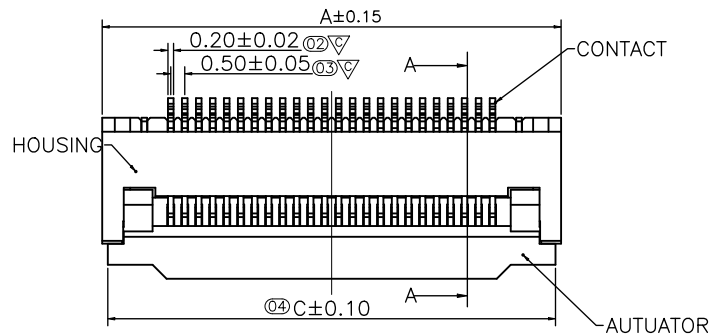

Note:

1. Material

1.1: Housing: LCP UL94-V0 Color:Nature.

1.2: Actuator: LCP UL94-V0 Color:Black.

1.3: Contact: Phosphor Bronze.

1.4: LEG: Brass.

2. Plating

2.1: Contact: Matte Tin Or Gold Plating Nickel Overall .





2.2: LEG: Matte Tin Plating Over Nickel.

3. Rating:


3.1: Operating Voltage: 50V AC/DC.

3.2: Current Rating: 0.5A AC/DC.

3.3: Operating Temperature: -55° C~+85° C.

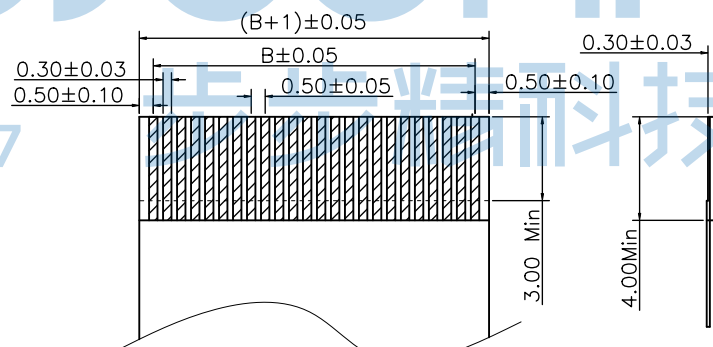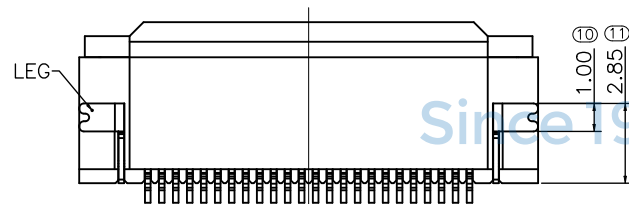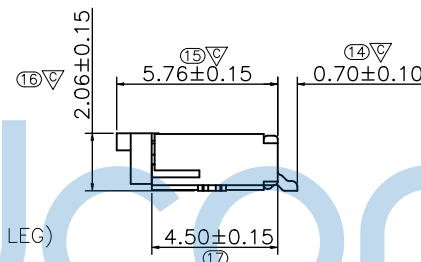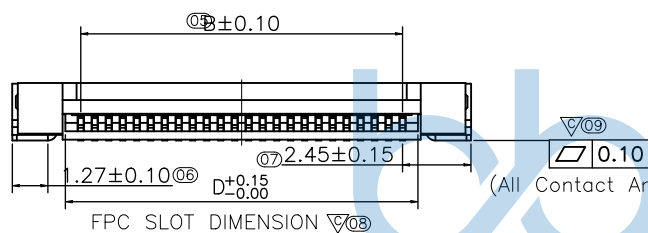

RECOMMENDED FPC DIMENSION

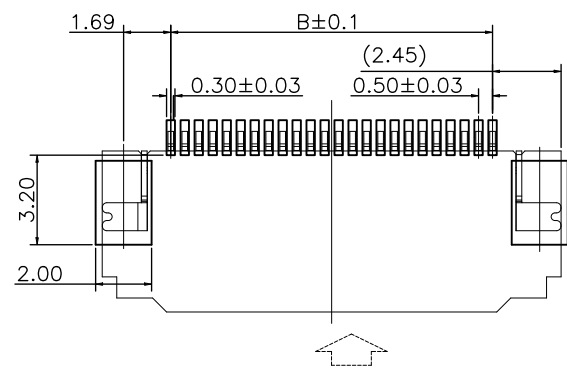

FPC/FFC INSERT DIRECTION
RECOMMENDED P.C.B LAYOUT



PIN	DIM A	DIM B	DIM C	DIM D	PIN	DIM A	DIM B	DIM C	DIM D
4	6.40	1.50	6.00	2.50	43	25.90	21.00	25.50	22.00
5	6.90	2.00	6.50	3.00	44	26.40	21.50	26.00	22.50
6	7.40	2.50	7.00	3.50	45	26.90	22.00	26.50	23.00
7	7.90	3.00	7.50	4.00	46	27.40	22.50	27.00	23.50
8	8.40	3.50	8.00	4.50	47	27.90	23.00	27.50	24.00
9	8.90	4.00	8.50	5.00	48	28.40	23.50	28.00	24.50
10	9.40	4.50	9.00	5.50	49	28.90	24.00	28.50	25.00
11	9.90	5.00	9.50	6.00	50	29.40	24.50	29.00	25.50
12	10.40	5.50	10.00	6.50	51	29.90	25.00	29.50	26.00
13	10.90	6.00	10.50	7.00	52	30.40	25.50	30.00	26.50
14	11.40	6.50	11.00	7.50	53	30.90	26.00	30.50	27.00
15	11.90	7.00	11.50	8.00	54	31.40	26.50	31.00	27.50
16	12.40	7.50	12.00	8.50	55	31.90	27.00	31.50	28.00
17	12.90	8.00	12.50	9.00	56	32.40	27.50	32.00	28.50
18	13.40	8.50	13.00	9.50	57	32.90	28.00	32.50	29.00
19	13.90	9.00	13.50	10.00	58	33.40	28.50	33.00	29.50
20	14.40	9.50	14.00	10.50	59	33.90	29.00	33.50	30.00
21	14.90	10.00	14.50	11.00	60	34.40	29.50	34.00	30.50
22	14.40	10.50	15.00	11.50	61	34.90	30.00	34.50	31.00
23	14.90	11.00	15.50	12.00	62	35.40	30.50	35.00	31.50
24	16.40	11.50	16.00	12.50	63	35.90	31.00	35.50	32.00
25	16.90	12.00	16.50	13.00	64	36.40	31.50	36.00	32.50
26	17.40	12.50	17.00	13.50	65	36.90	32.00	36.50	33.00
27	17.90	13.00	17.50	14.00	66	37.40	32.50	37.00	33.50
28	18.40	13.50	18.00	14.50	67	37.90	33.00	37.50	34.00
29	18.90	14.00	18.50	15.00	68	38.40	33.50	38.00	34.50
30	19.40	14.50	19.00	15.50	69	38.90	34.00	38.50	35.00
31	19.90	15.00	19.50	16.00	70	39.40	34.50	39.00	35.50
32	20.40	15.50	20.00	16.50	71	39.90	35.00	39.50	36.00
33	20.90	16.00	20.50	17.00	72	40.40	35.50	40.00	36.50
34	21.40	16.50	21.00	17.50	73	40.90	36.00	40.50	37.00
35	21.90	17.00	21.50	18.00	74	41.40	36.50	41.00	37.50
36	22.40	17.50	22.00	18.50	75	41.90	37.00	41.50	38.00
37	22.90	18.00	22.50	19.00	76	42.40	37.50	42.00	38.50
38	23.40	18.50	23.00	19.50	77	42.90	38.00	42.50	39.00
39	23.90	19.00	23.50	20.00	78	43.40	38.50	43.00	39.50
40	24.40	19.50	24.00	20.50	79	43.90	39.00	43.50	40.00
41	24.90	20.00	24.50	21.00	80	44.40	39.50	44.00	40.50
42	25.40	20.50	25.00	21.50					

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0428-1
DR. TSP





深圳市步步精科技有限公司

.X: ±0.38 X*: ±3°
.XX: ±0.25 .X*: ±2°
.XXX: ±0.13 .XX*: ±1°

NAME:
FPC 0.5-19P 翻盖下接 H=2.0 镀锡 编带



APPD. JM_Zheng
CHKD. LYX

PJ. NO.: PC.02.04-32-D002
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

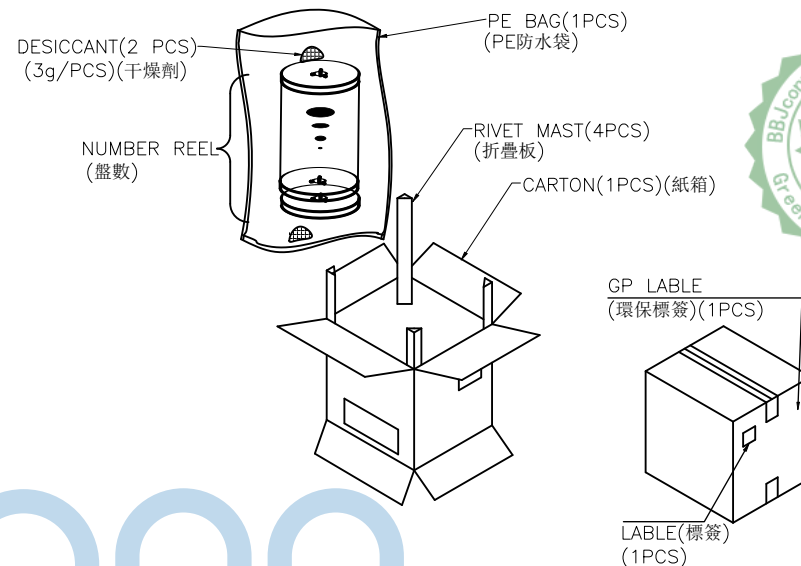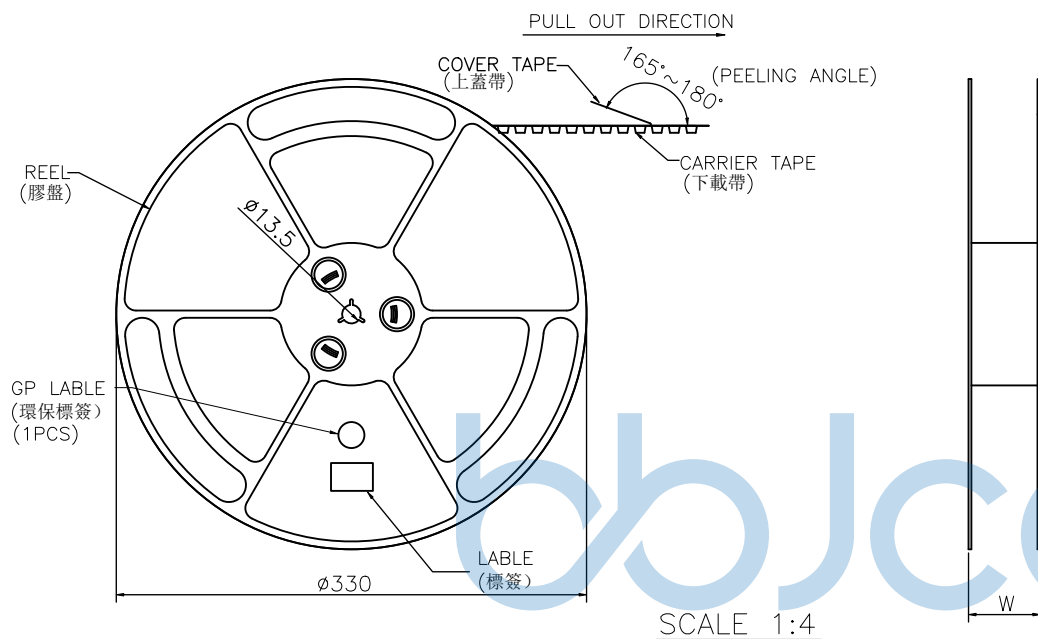

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
 2. Carrier camber is within 1mm in 100mm.
 3. Material: black conductive polystyrene alloy.
 4. Material Thickness: 0.3 ± 0.05 mm.
 5. All dimensions meet EIA-481-B requirements.
 6. 2000pcs Pef Reel.
- For tape width(dim W)16 and 24mm pilot holes are provided on one sides.
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

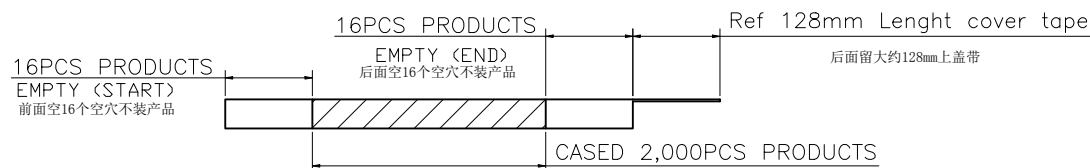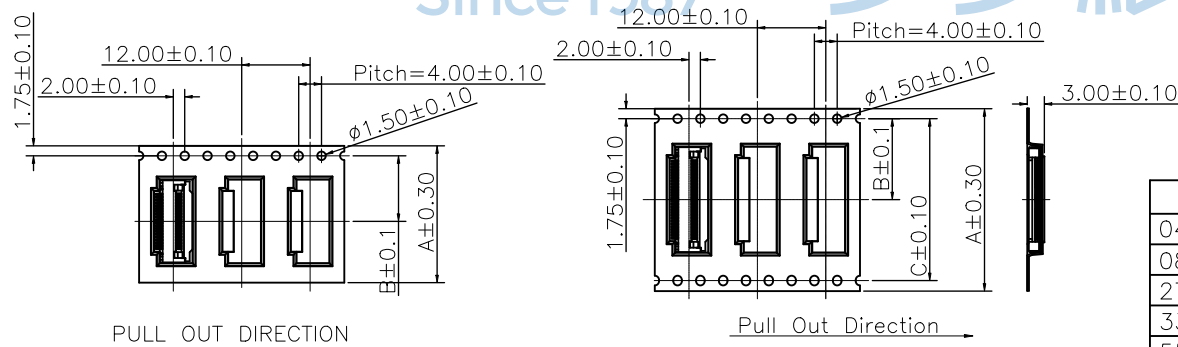

PIN NO.	W	A	B	C	PCS/Reel	Reel/Carton	Sum(PCS)
04PIN~07PIN	20.5	16	7.50	—	2,000	15	30,000
08PIN~26PIN	28.5	24	11.5	—	2,000	10	20,000
27PIN~32PIN	36.5	32	14.2	28.4	2,000	08	16,000
33PIN~54PIN	48.5	44	20.2	40.4	2,000	06	12,000
55PIN~64PIN	60.5	56	26.2	52.4	2,000	05	10,000

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE



深圳市步步精科技有限公司

NAME: FPC 0.5-19P 翻盖下接 H=2.0 镀锡 编带

NOT BE USED IN WHOLE

APPD.	JM_Zheng
-------	----------



PJ, NQ, PC.02.04-32-D002

OR IN PART WITHOUT

11/1/21	011_

	SIZE: A4	DRW NO.:
	DATE: 2024-07-10	

SIZE: A4	DRW NO.:
----------	----------

PRIOR WRITTEN PERMISS

CHKD. LYX

	SIZE: 111 DR
FINISH: SEE NOTES	

4. SEE NOTES	MAT'L : SEE NOTES
--------------	-------------------

PDWG,NO: 0428-1

DR.	TSE
-----	-----

FINISH: SEE NOTES	
SCALE: 1/4" = 1'-0"	REV: 1/1/00

MAT L: SEE NOTES	
UNIT: mm	PAGE: 3/3